


## Front Suspension:

## Reset Forms

Ride Height:	23mm (Body On)
Camber:	-2°
Toe:	Tierod Gap = 42.25mm
Anti-Roll Bar:	1.0mm
Arm Type:	#71138 FT Gullwing, Carbon
Tower Type:	FTR Low Profile
Wheel Hex:	#71112 FT Titanium
Steering Block:	#92414 Standard - 4 Trail / KPI 2
Caster Block Insert:	0° (Sand To Fit)
Bulkhead Type:	#91658 FT +2.5°
Kick-Up Angle:	25° Total
Notes:	#92467 B7 Caster Block Link, 0 (2mm Shim) Sand Or Shim Tower For Front Shock Cap Clearance

Bump Steer Spacing:	0mm
Steering Plate:	#91902 HT +1
Steering Stop Spacing:	0mm
Caster Block Spacing:	1mm
Axle Height:	+3 <input type="checkbox"/> +2 <input checked="" type="checkbox"/> +1 <input type="checkbox"/> +0 <input type="checkbox"/>

Ball Stud Spacing:	1mm
Steering Bellcrank Position:	Up <input type="checkbox"/> Down <input checked="" type="checkbox"/>
Ball Stud Spacing:	1mm

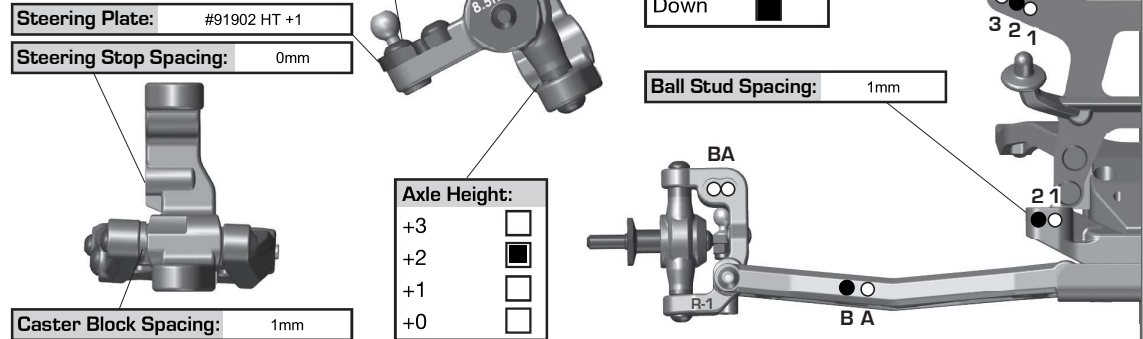


## Rear Suspension:

Ride Height:	23mm (Body On)
Camber:	-2°
Anti-Roll Bar:	None
Arm Type:	#71140 Standard
Tower Type:	FTR Low Profile +6
Arm Spacing:	Arms Forward
Wheel Hex:	#91610 FT Clamping Hex, 7.0mm
Shock Mounting Position:	Front of Arm <input checked="" type="checkbox"/> Rear of Arm <input type="checkbox"/>
Hub Spacing:	Fwd <input type="checkbox"/> Mid <input checked="" type="checkbox"/> Back <input type="checkbox"/>
CVA Bone Length:	#71113 91mm
CVA Axle Type:	#92207 66mm
Notes:	#91772 Arm Mount, C #91688 Arm Mount, D

C Mount:	Aluminum <input checked="" type="checkbox"/> Brass <input type="checkbox"/>
D Mount:	Aluminum <input checked="" type="checkbox"/> Brass <input type="checkbox"/>

Axle Height:	▼0 3▲ +3 ▼1 2▲ +2 ▲1 2▼ +1 ▲0 3▼ +0
--------------	--

Camber Link Spacing:	3mm
Ball Stud Spacing:	2mm
Ball Stud Spacing:	2mm w/ #91889 +2mm

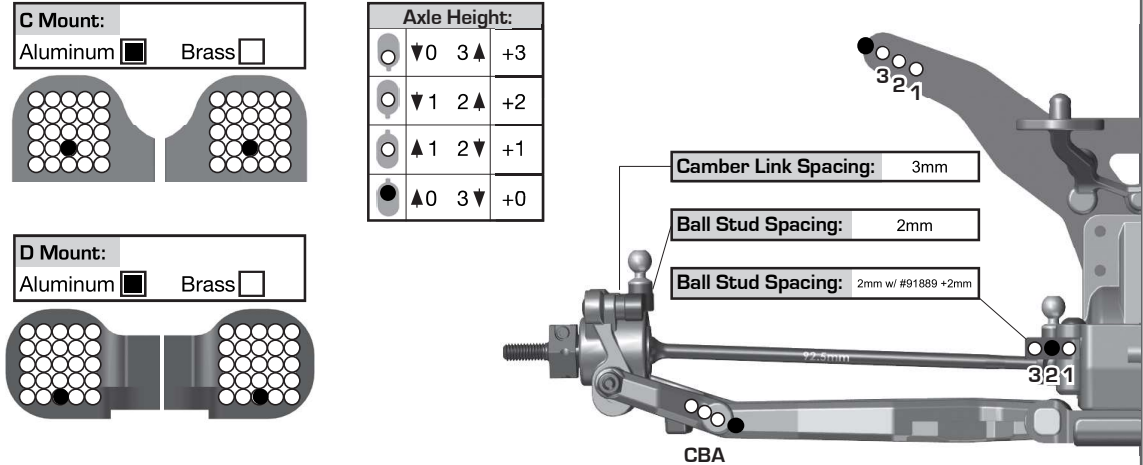

## Electronics:

Radio:	Sanwa M17	Servo:	Reedy 1705A
EPA: Throttle:	100 %	Brake:	95 %
ESC:	#27016 Reedy Blackbox 610R		
ESC Settings:	See Setup Sheet		
Motor / Wind:	#27492 Reedy Sonic M4 6.5T DE	Timing:	20°
Pinion:	#1337 FT 19T	Spur:	#92296 Octalock 81T
Battery:	#27382 Reedy SG5 6400mAh		
Battery Position:	Back 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3 <input type="checkbox"/> 4 <input checked="" type="checkbox"/> 5 <input type="checkbox"/> Forward		
Battery Weight:	None		

## Drivetrain:

Transmission:	Laydown: <input checked="" type="checkbox"/> Layback: <input type="checkbox"/>
Differential:	Ball Diff: <input checked="" type="checkbox"/>
Height:	3 Gear Diff: <input type="checkbox"/>
Diff Setting:	#91918 FT Diff Decoder = 225
Notes:	

## Slipper Clutch:

Type:	
# of Pads:	#92286 FT LCF, 19mm
Setting:	#91801 Slipper Spring

## Shocks:

	Front	Rear
Piston:	2 x 1.6 + 1 x 1.2	2 x 1.7 + 1 x 1.3
Thickness:	#91936 FT 2.0	#91937 FT 2.0
Fluid:	#5474 FT 35wt	#5472 FT 30wt
Spring:	1Up Green	1Up Yellow
Limiters:	Int: 0 Ext: 0	Int: 0 Ext: 0
Stroke:	23.0mm	29.5mm
Eyelet Length:	+4	+0
Cup Offset:	5mm	5mm
Notes:	#91923 & #71159 FT Fox Shock Bodies; #91618 & 91620 FT Chrome Shaft	



## Track Info:

Size:	Small <input type="checkbox"/> Medium <input type="checkbox"/> Large <input type="checkbox"/> Extra Large <input checked="" type="checkbox"/>
Surface:	Dirt <input type="checkbox"/> Carpet <input type="checkbox"/> AstroTurf <input checked="" type="checkbox"/> Multi Surface <input type="checkbox"/>
Traction:	Low <input type="checkbox"/> Medium <input type="checkbox"/> High <input type="checkbox"/> Very High <input checked="" type="checkbox"/>
Moisture:	Dry <input type="checkbox"/> Damp <input checked="" type="checkbox"/> Wet <input type="checkbox"/>
Condition:	Indoor <input checked="" type="checkbox"/> Outdoor <input type="checkbox"/> Dusty <input type="checkbox"/> Hard Packed <input type="checkbox"/> Bumpy <input checked="" type="checkbox"/> Grooved <input checked="" type="checkbox"/> Smooth <input checked="" type="checkbox"/> Loamy <input type="checkbox"/>
Temperature:	Ambient: 80F Track: 80F
Notes:	

## Tires:

Front Tires:	Pro-Line Bald Eagles (Glued Sidewalls)
Front Compound:	S3
Front Insert:	RM2 Black (Glued To Wheel)
Rear Tires:	Pro-Line Bald Eagles
Rear Compound:	S3
Rear Insert:	RM2 Black (Glued To Wheel)
Wheel (F/R):	Pro-Line Velocity
Notes:	30mm Removed From Tire Diameter & 1st Step Of Bead

## Body, Weight:

Body:	Pro-Line Kit + Wing
Body Height:	
Servo Weights:	None
Electronic Weights:	Aluminum
Total Vehicle Weight:	
Notes:	

Vehicle Comments: #27457 Reedy Motor Fan, Aluminum; #91887 FT Servo Mount; 1Up Titanium Tierods & Screws; FTR Body Mounts; Clearance For Front Shock Cap