

Setup Sheet for Team Associated's RC8T

Rev. 1

:: Front Suspension

anti-roll bar:
 2.2 - black
 2.5 - silver
 2.8 - gold

steering rack:
back
mid
front

hinge pin bushing
2
 up down


camber: -2 °

caster: 16 °

toe: 0 °

kickup bushing
2
 up down

ride height: 37mm

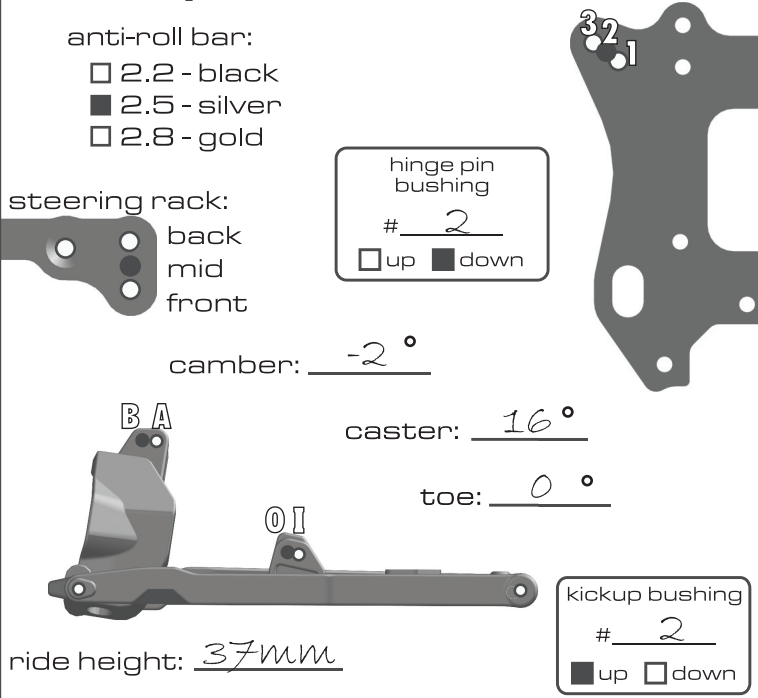

:: Rear Suspension

anti-roll bar:
 2.2 - black
 2.5 - silver
 2.8 - gold

wheelbase:
 long
 medium
 short


camber: -2 °

toe: 3 °

hub:
upper
lower

ride height: 43mm

anti-squat bushing
2
 up down

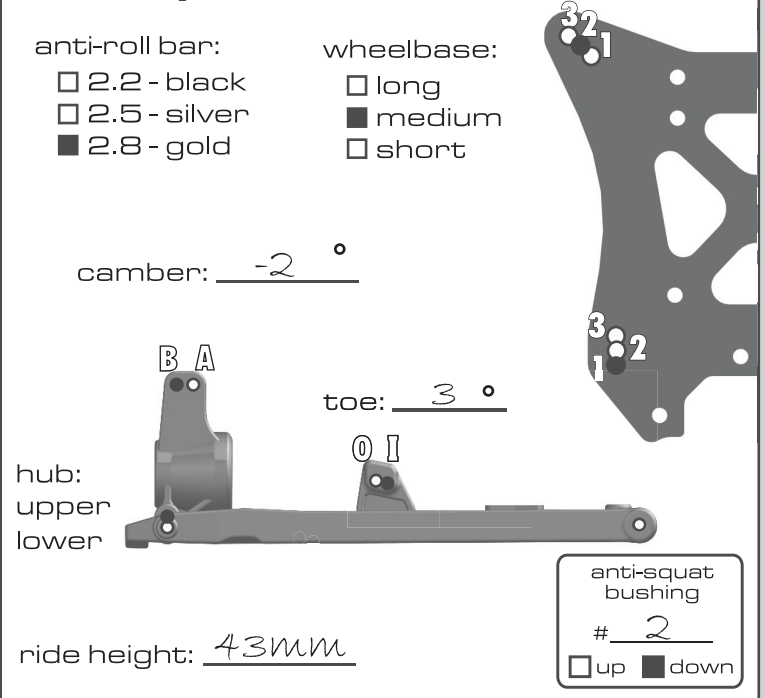

:: Front Shocks

spring: (5.1 lb) silver piston: 1.6
shock fluid: 50 wt. length: 113mm
shock cap: _____

:: Rear Shocks

spring: (3.3 lb) silver piston: 1.6
shock fluid: 50 wt. length: 125mm
shock cap: _____

:: Differentials

front fluid: 7000cst
center fluid: 7000cst
rear fluid: 7000cst

:: Wing

location: forward back
angle: low med. high
type: _____

:: Chassis Braces

standard molded aluminum
other: _____

:: Engine

engine: 30% recommended restrictor: _____
muffler: _____ temp: _____
glow plug: _____
fuel: _____

:: Gearing/Clutch

gearing: 14/54
shoes: 3 x aluminum _____ x fiber
spring: _____ x .9mm 3 x 1.0mm _____ x 1.1mm
notes: _____

:: Notes

:: Tires

tire (F/R): _____ / _____
compound (F/R): _____ / _____
insert: _____ wheel: _____

:: Race and Vehicle Comments

qualify: _____ main: _____ finish: _____ tq:
comments: _____

:: Track Info

traction: high med. low
surface: smooth bumpy
 blue groove soft dirt grass
 clay wet dusty
other: _____
