



# SC10

SHORT COURSE

#7027 SC10 Kit



1:10 Scale Electric 2WD Offroad Race Truck Manual

# TEAM ASSOCIATED





## :: Introduction

Thank you for purchasing this Team Associated product. This manual contains instructions and tips for building and maintaining your new SC10. Please take a moment to read through it and familiarize yourself with these steps. We are continually changing and improving our designs; therefore, actual parts may appear slightly different than the illustrations. New parts will be noted on supplementary sheets located in the appropriate parts bags. Check each bag for these sheets before you start to build.

## :: SC10 Features

- Built on 6-time National Champion RC10 T4 Platform
- Realistic Short Course Racing Truck 0.040" polycarbonate body
- KMC style wheels front and rear
- Aggressive tread multi-terrain scale tire with re-enforced sidewalls
- Realistic bumpers front and rear for maximum durability
- Rubber AE logo mud flaps
- 2.6:1 Ratio Gearbox equipped with sealed gear differential
- Dual-sided externally adjustable slipper clutch
- Molded composite low-CG chassis
- 2 spur gears included - 75 tooth gear for brushless stock and 87 tooth gear for brushed / modified.
- Set-screw to secure antenna tube
- Hinged battery hold-down strap fits up to 8 cell battery pack (Reedy #699)
- Durable front and rear body mounts with adjustable height
- Complete set of 14 rubber sealed ball bearings
- Rugged steel turnbuckles
- Fully adjustable caster, camber, and toe-in
- Angled bellcrank "co-planar" steering
- Built in servo saver
- Vertical ball end adjustment, front and rear
- Blue aluminum shock bodies with molded pre-load clips
- Dog bone rear axles

## :: Additional

Your new SC10 truck comes unassembled and requires the following items for completion:

- |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                               |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>Items:</p> <ul style="list-style-type: none"> <li>• R/C two channel surface frequency radio system</li> <li>• AA-size batteries for transmitter</li> <li>• 6 cell battery pack or LiPo battery pack</li> <li>• Battery charger (we recommend a peak detection charger)</li> <li>• Electronic Speed Control (ESC)</li> <li>• R/C electric motor</li> <li>• Pinion gear, size to be determined by type and wind of motor you will be using</li> <li>• Lexan specific spray paint</li> </ul> | <p>Tools Included:</p> <ul style="list-style-type: none"> <li>• Allen wrenches #6950 (.050", 1/16", 3/32", 5/64")</li> <li>• Molded tools #6956</li> <li>• Camber gauge #1719</li> <li>• Shock building tool #6429</li> </ul> |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

## :: Optional

Optional parts and gear to accessorize and maintain your SC10:

- |                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                          |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>• Green Slime shock lube (AE Part # 1105)</li> <li>• Cyanoacrylate glue (AE Part # 1597)</li> <li>• Thread Locking Compound (AE Part # 1596)</li> <li>• Silicone Shock Fluid (Refer to catalog for complete listings)</li> <li>• Silicone Diff Fluid (Refer to catalog for complete listings)</li> <li>• Body Scissors (AE Part # 1737)</li> <li>• Reamer / Hole Punch</li> <li>• FT Hex Wrenches (AE Part # 1541)</li> </ul> | <ul style="list-style-type: none"> <li>• Hobby Knife</li> <li>• Needle Nose Pliers</li> <li>• Wire Cutters</li> <li>• Soldering Iron</li> <li>• Calipers or a Precision Ruler</li> </ul> |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|




\*These Symbols Indicate a special note or instructions.

**There is a 1:1 fold out  
in the back of the manual.  
Fold it out while building  
your kit for easy parts sizing!**

## :: Steering Rack Build

### BAG A


#### A2 STEP 1

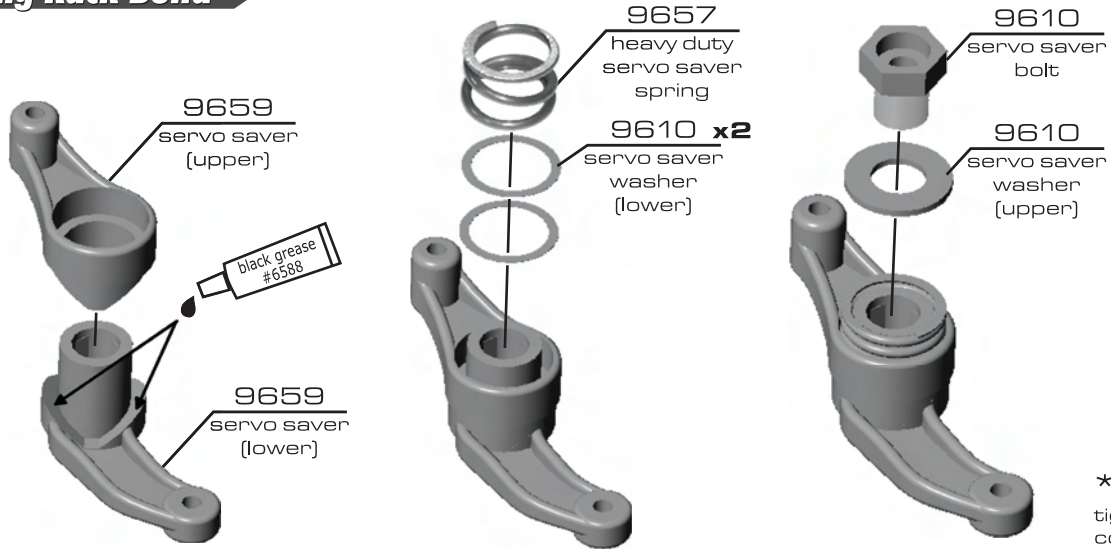

\* With supplied wrench, tighten servo saver bolt completely, but take care not to overtighten.


## :: Steering Rack Build (cont.)

#### A 2 / 3 STEP 2

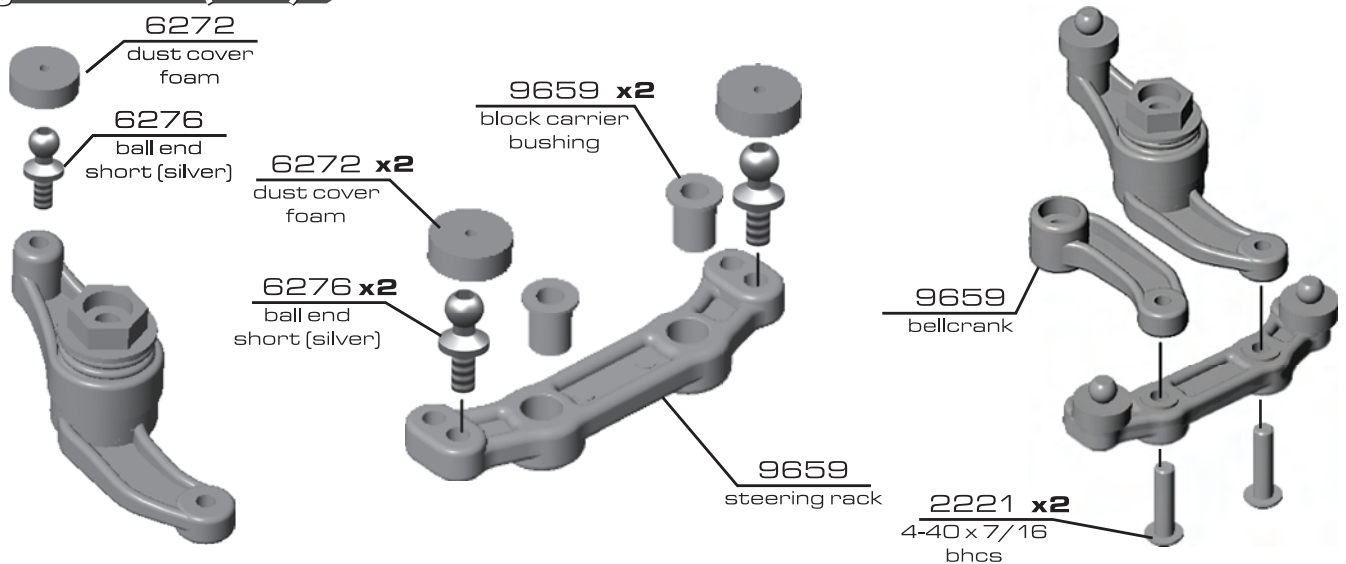

## :: Steering Rack Build (cont.)

#### A 4 / 5 STEP 2

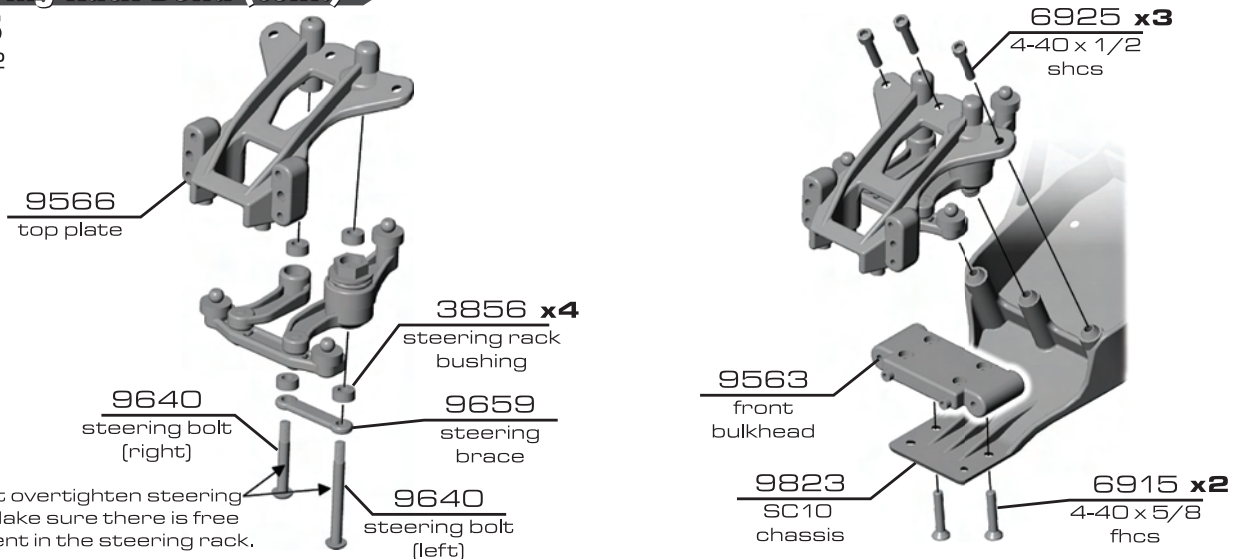


\* Do not overtighten steering bolts. Make sure there is free movement in the steering rack.

## :: Steering Knuckles Build

### BAG B

#### B 2


##### STEP 1

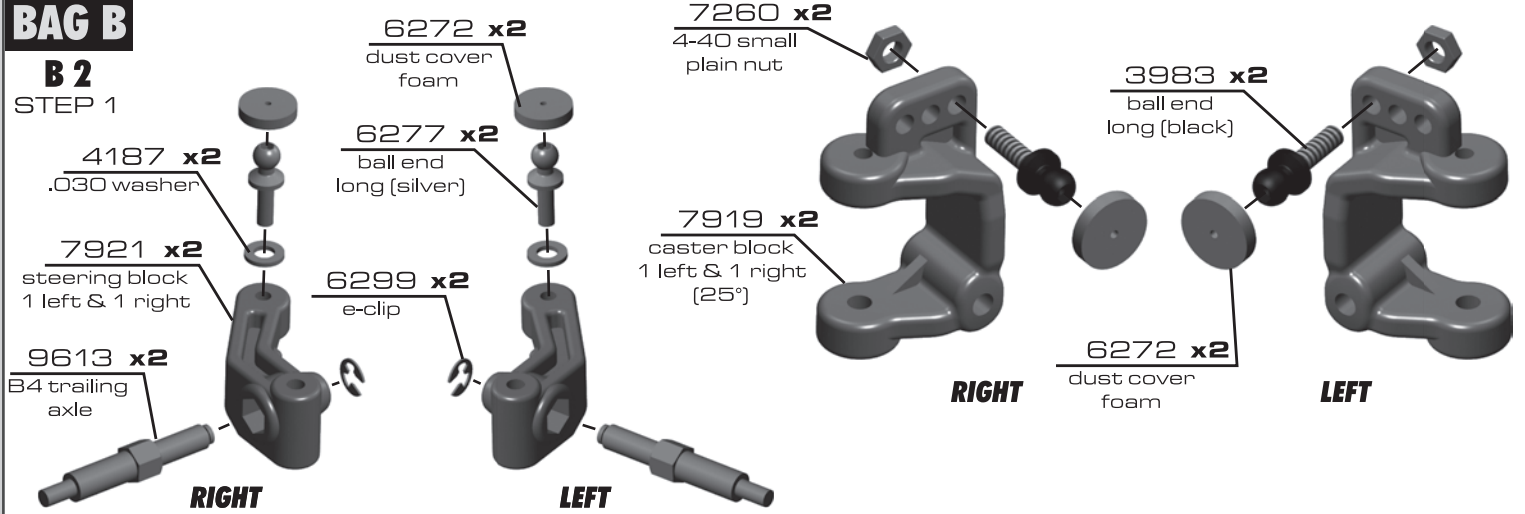

## :: Steering Knuckles Build (cont.)

#### B 2


##### STEP 2

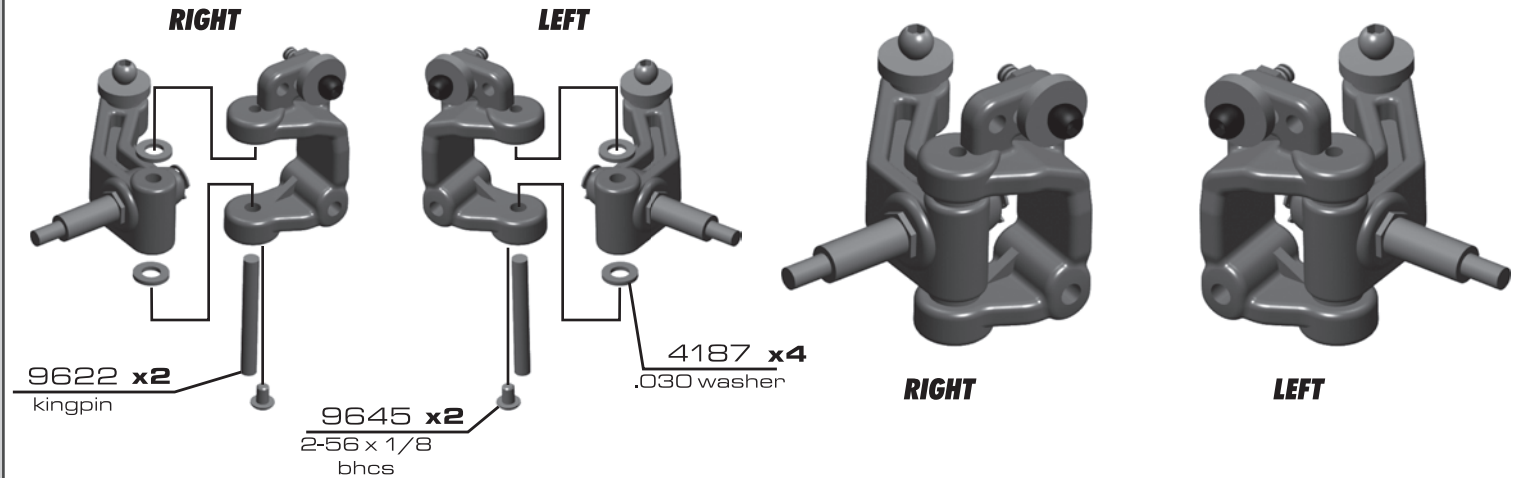

## :: Front Arms

#### B 3

##### STEP 3

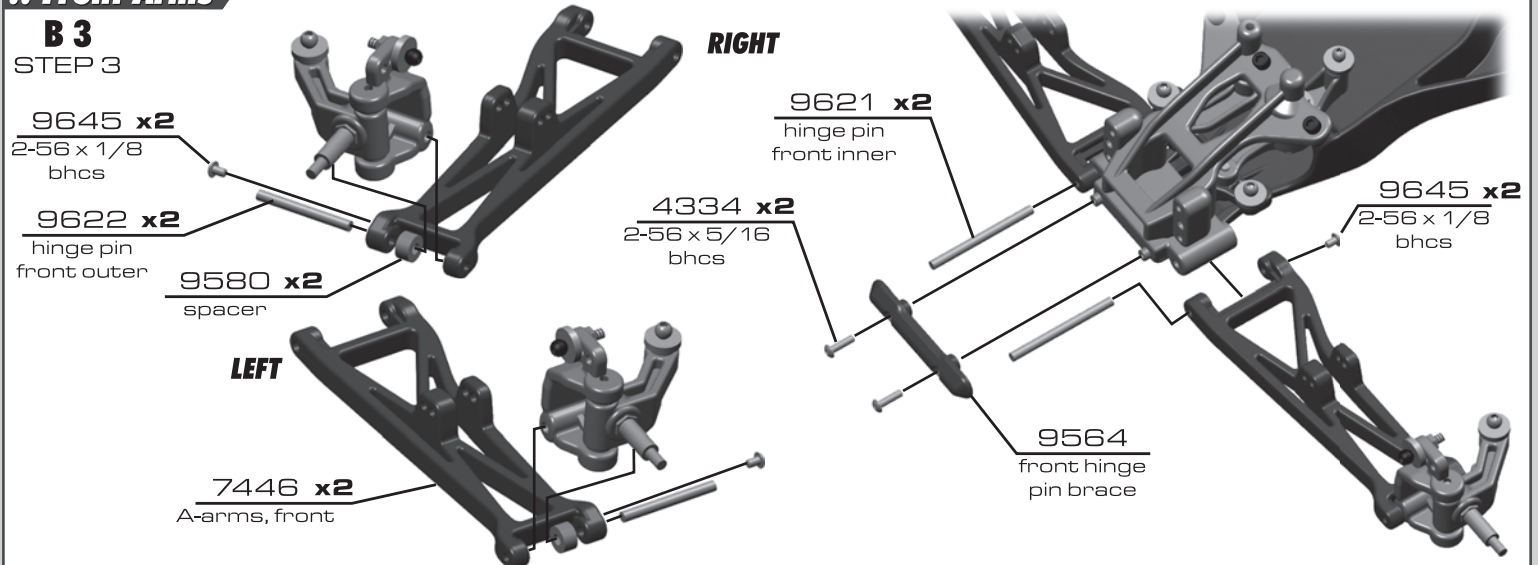




## :: Front Shock Tower

**B 4**


STEP 4

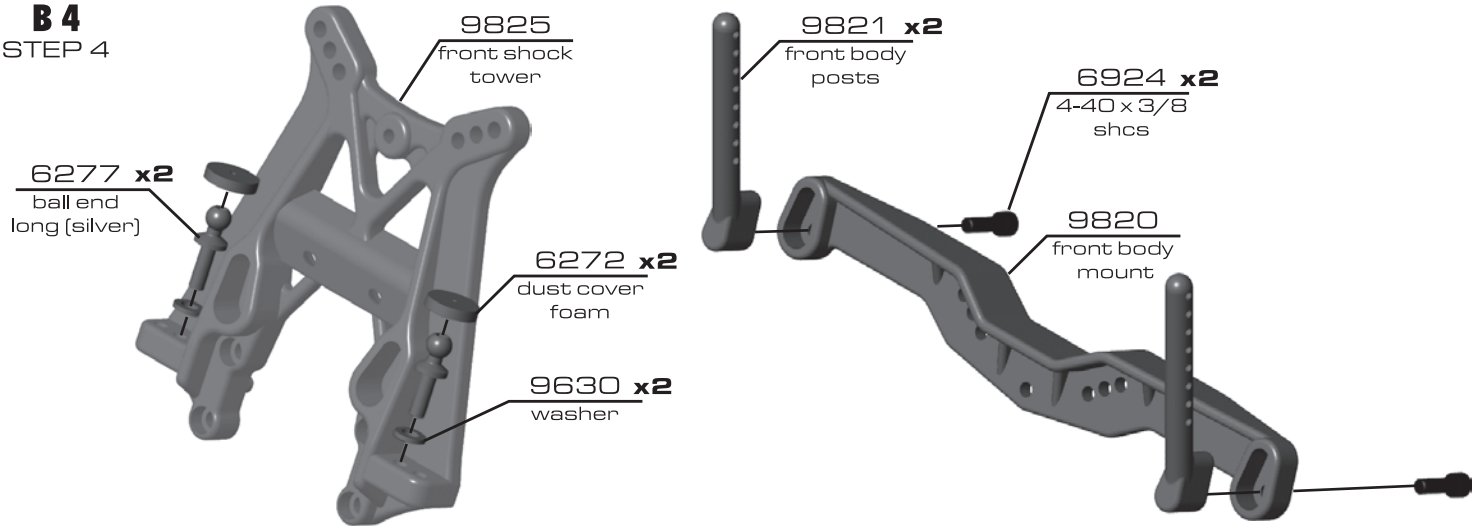

## :: Steering Knuckles Build (cont.)

**B 4**


STEP 5

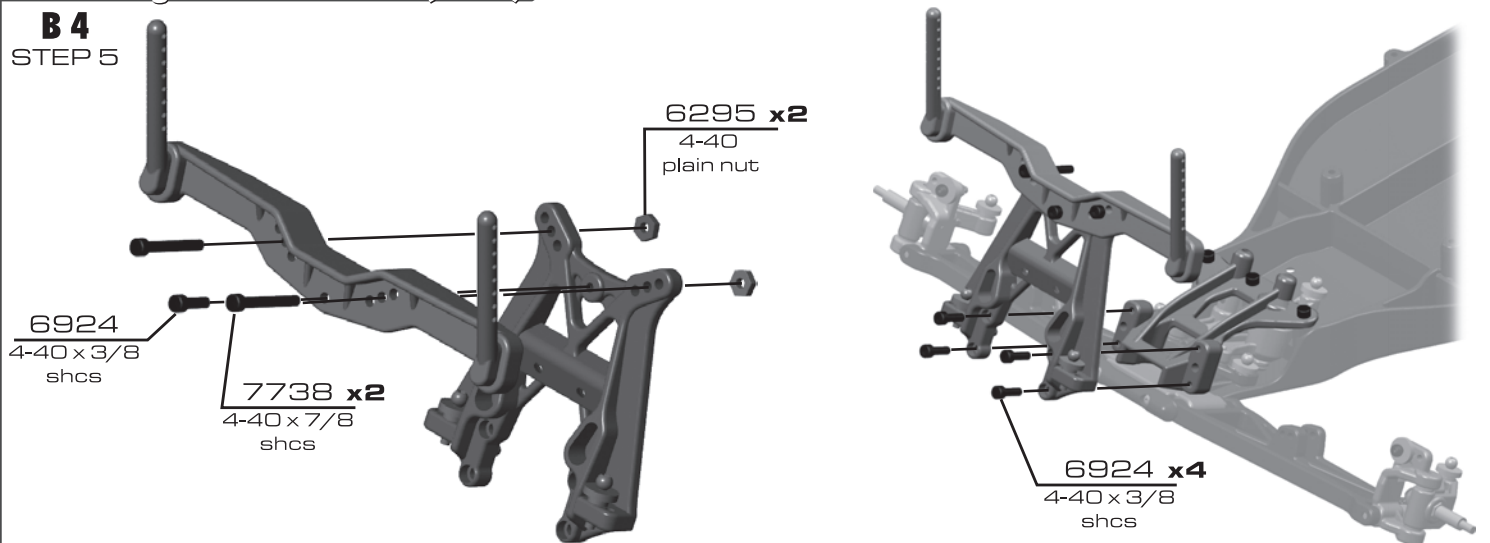

## :: Front Bumper

**B 5**

STEP 6

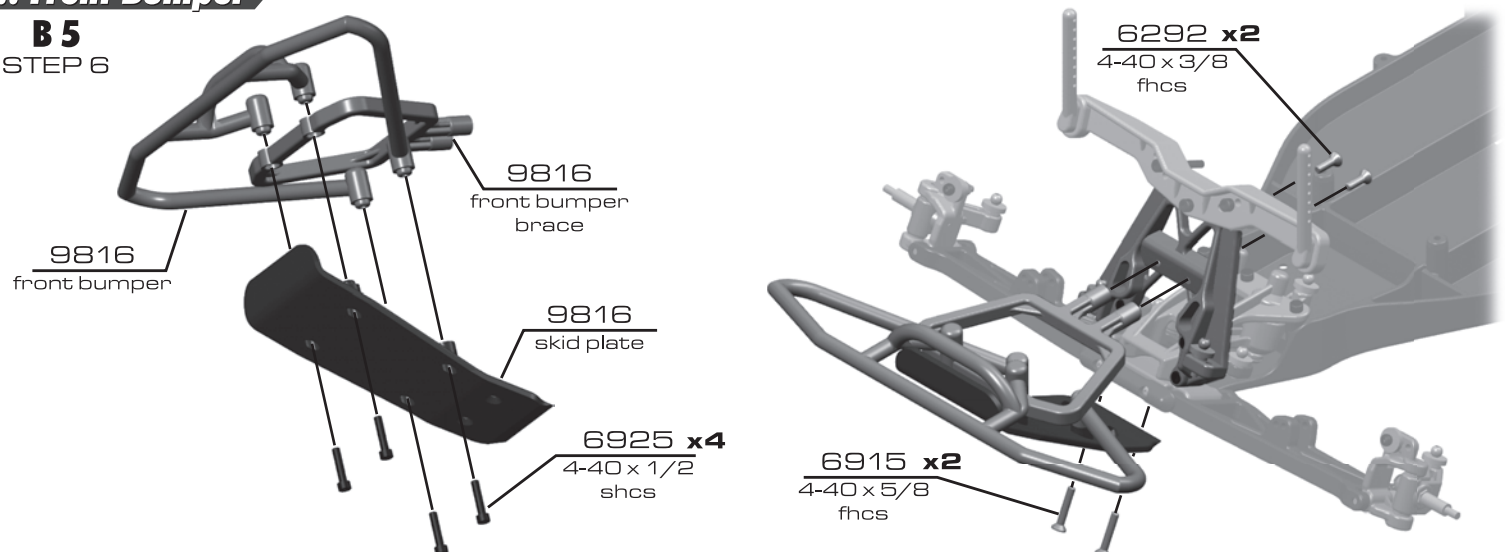


## :: Front Turnbuckles

**B 6**

STEP 7



\* Orient the notch to the left throughout the car. It indicates which end has the left hand threads.

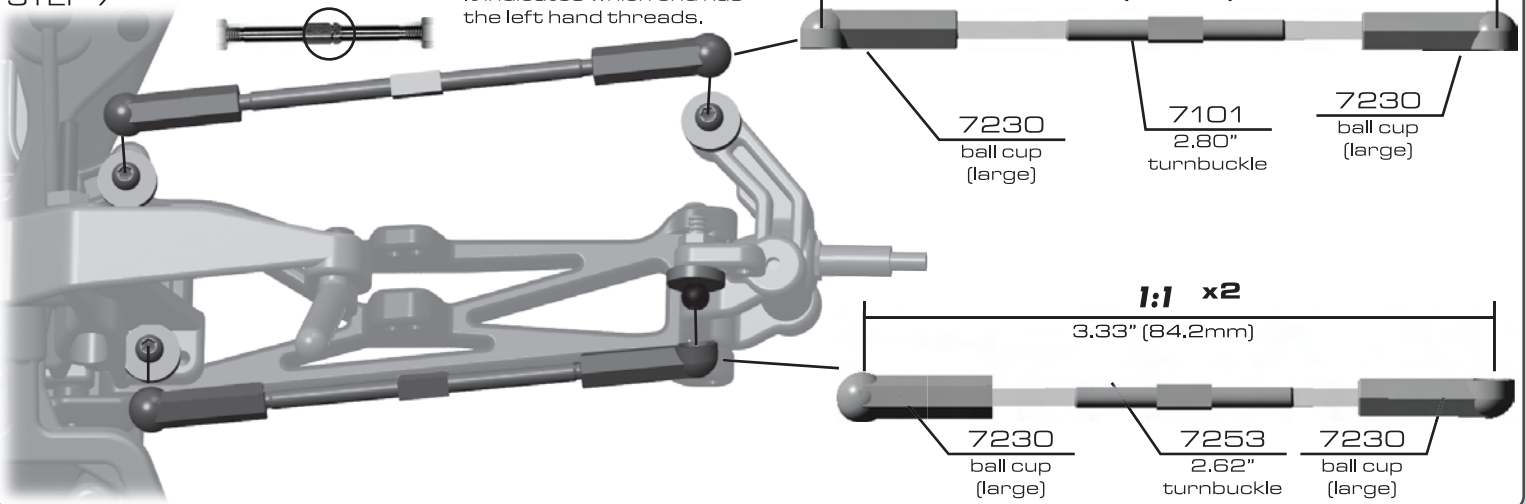


## :: Side Nerf Bars

**B 7**

STEP 8

9822 x2  
nerf bars  
1 right & 1 left

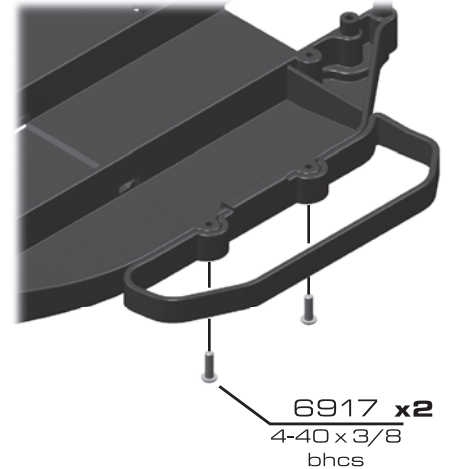


\* Twist and flex side nerf guards into place

## :: Transmission

**BAG C**
**C 2**


STEP 1

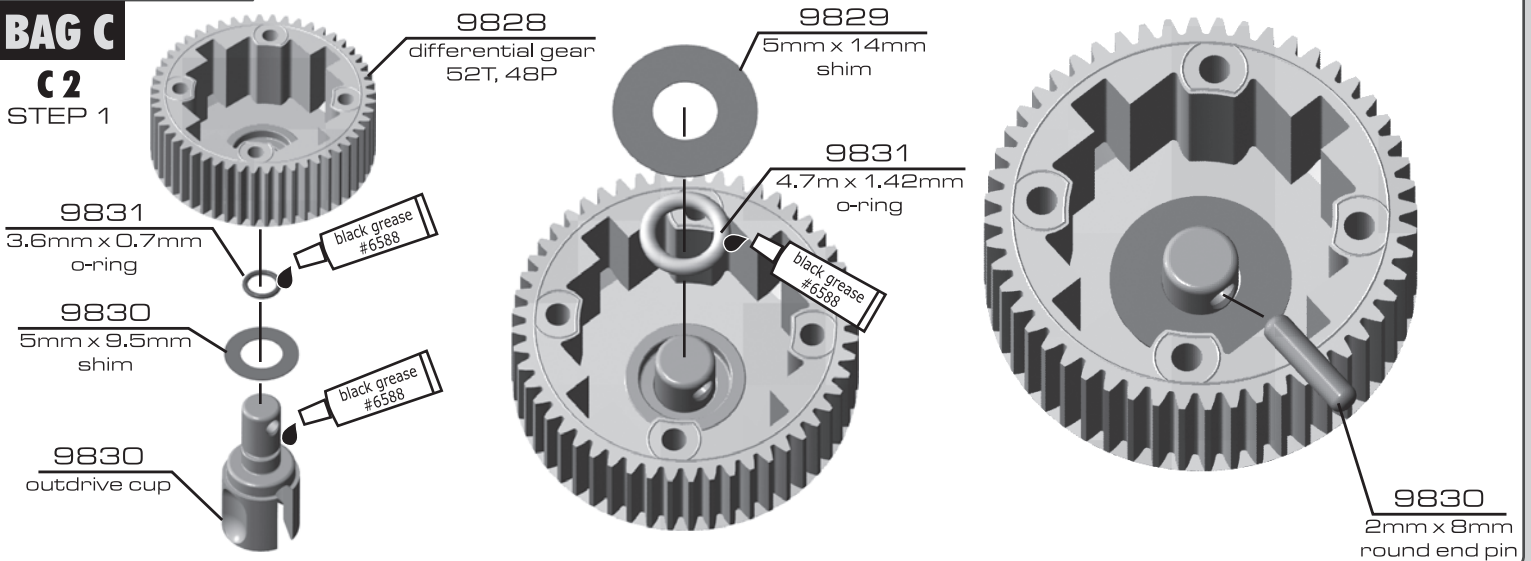




## :: Transmission (cont.)

### C2 / 3 STEP 2

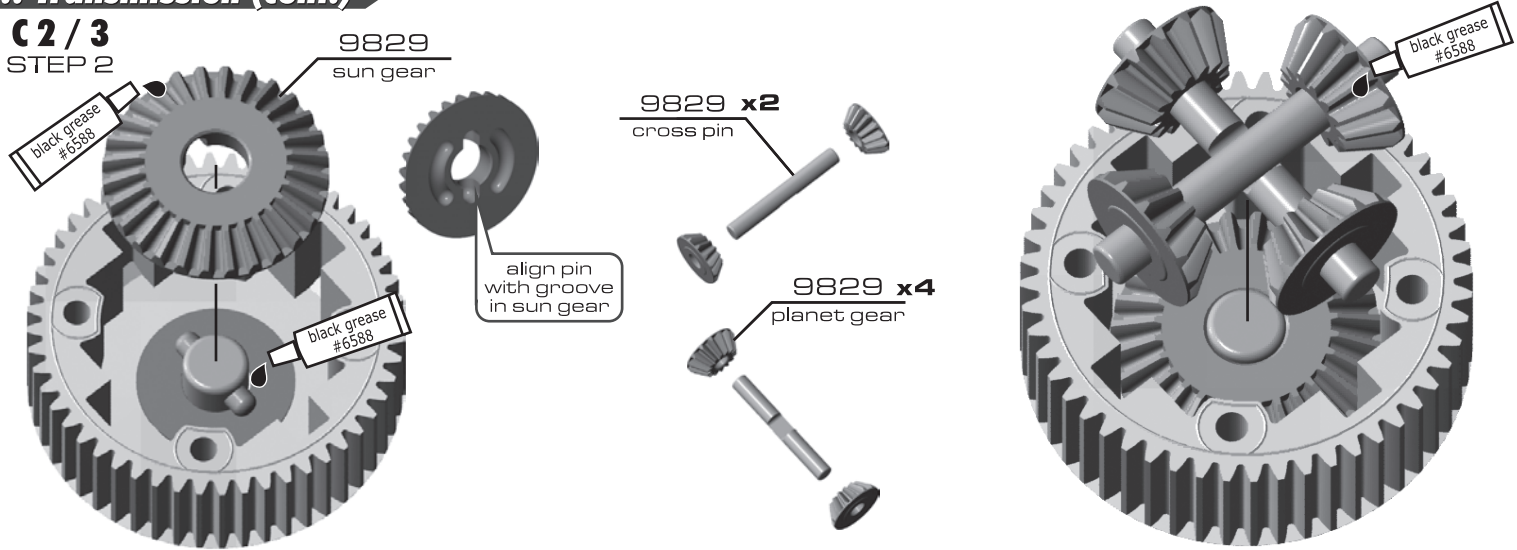


## :: Transmission (cont.)

### C2 STEP 3

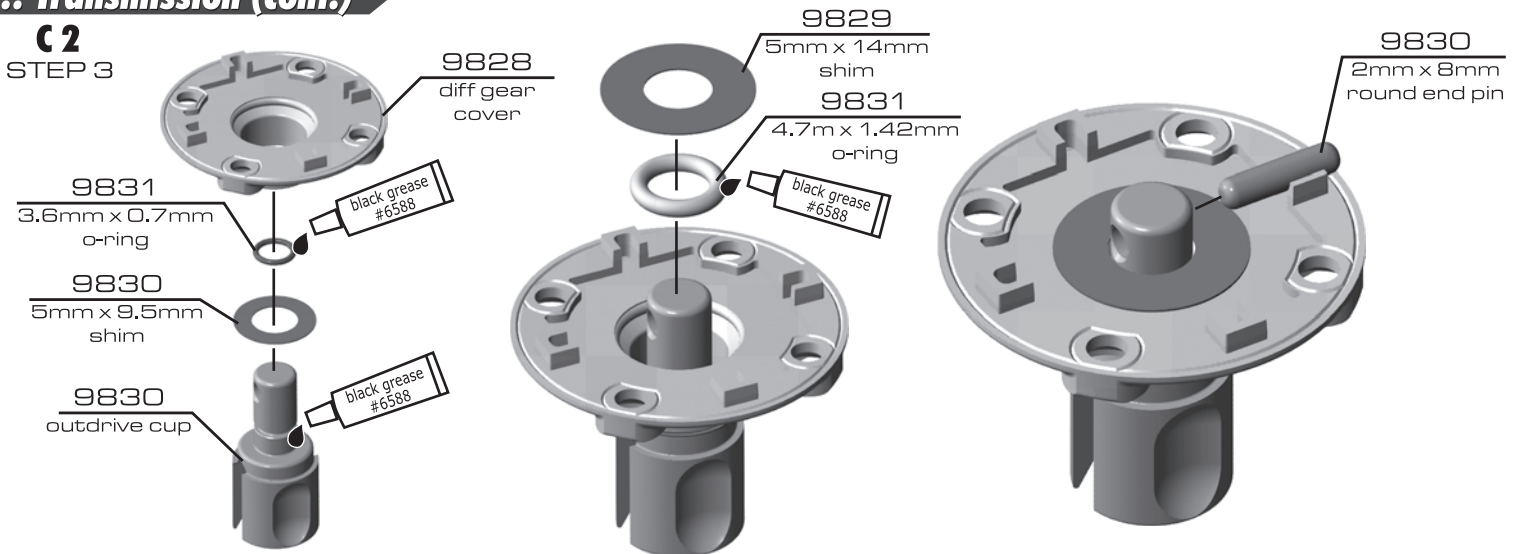


## :: Transmission (cont.)

### C2 / 4 STEP 4

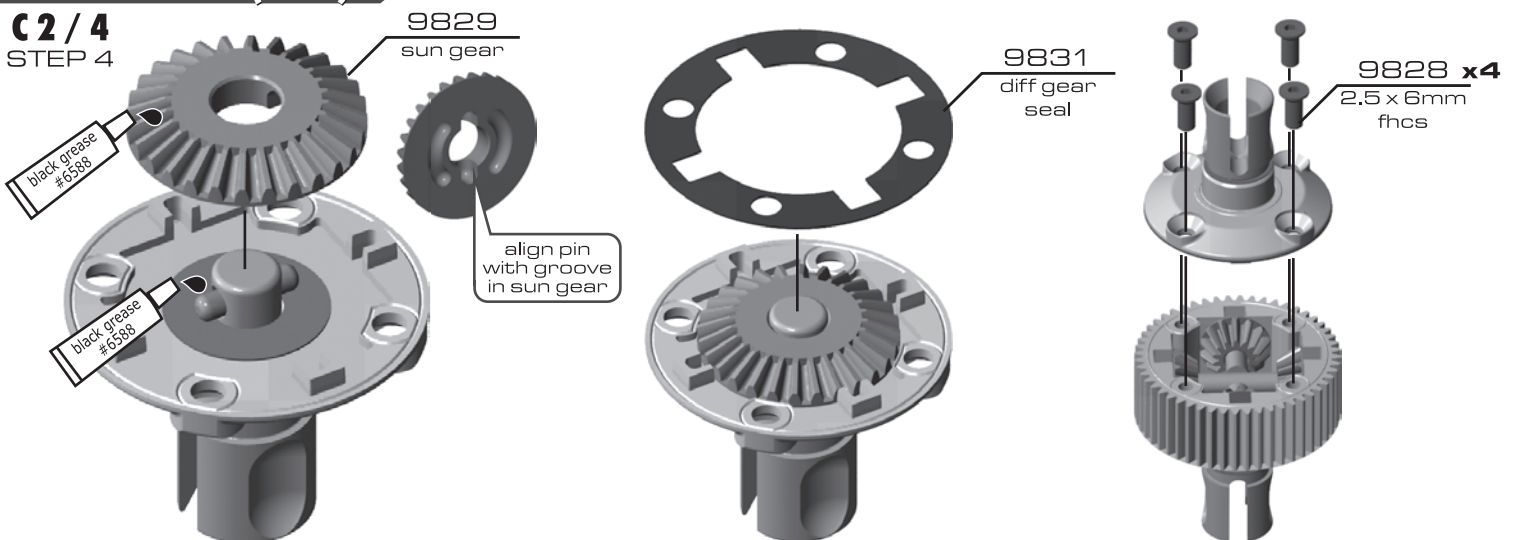


## :: Transmission (cont.)

**C5/6**  
STEP 5

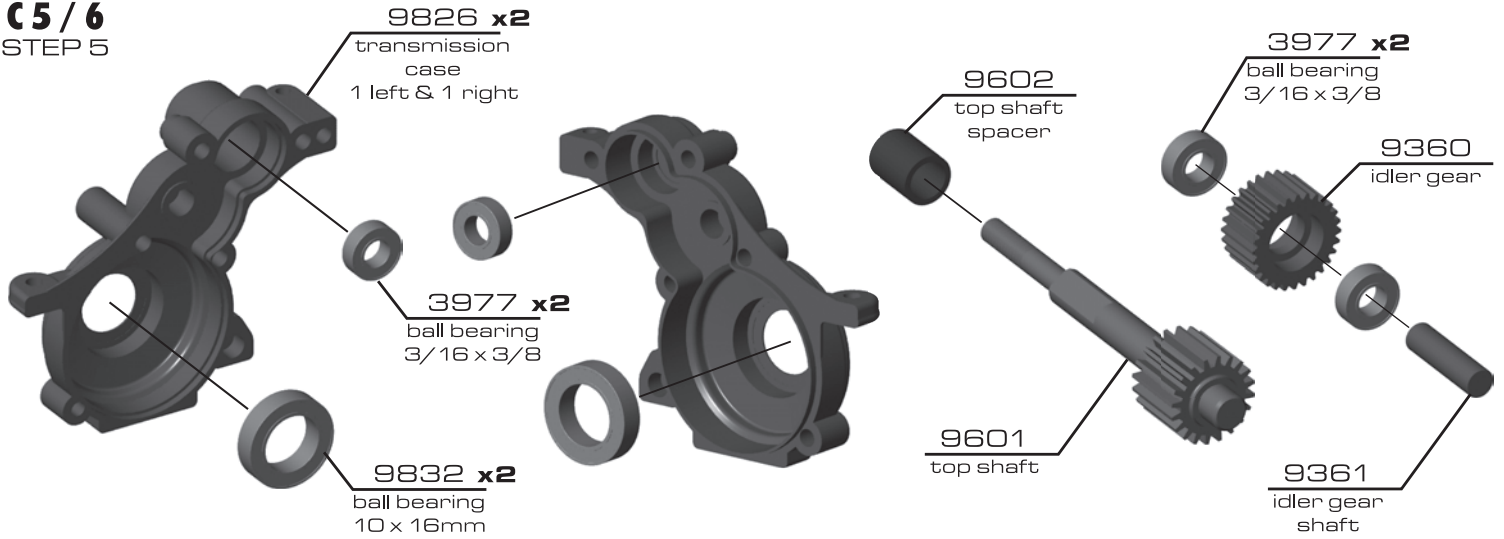


## :: Transmission (cont.)

**C7**  
STEP 6

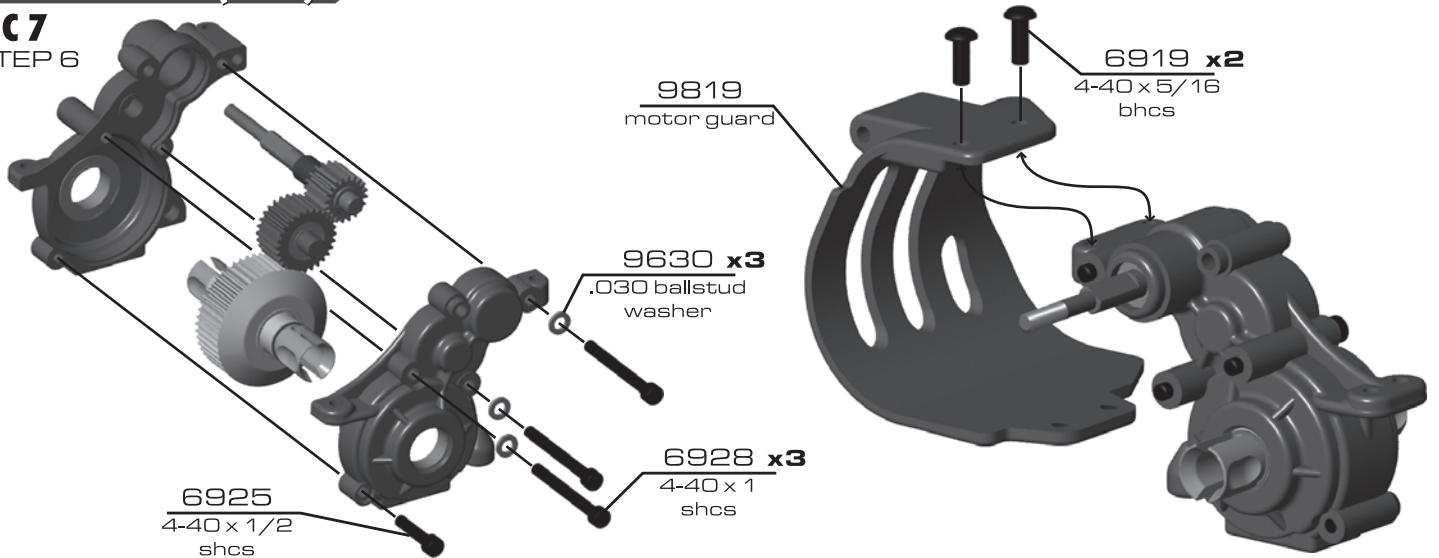

## :: Transmission (cont.)


**C8/9**  
STEP 7

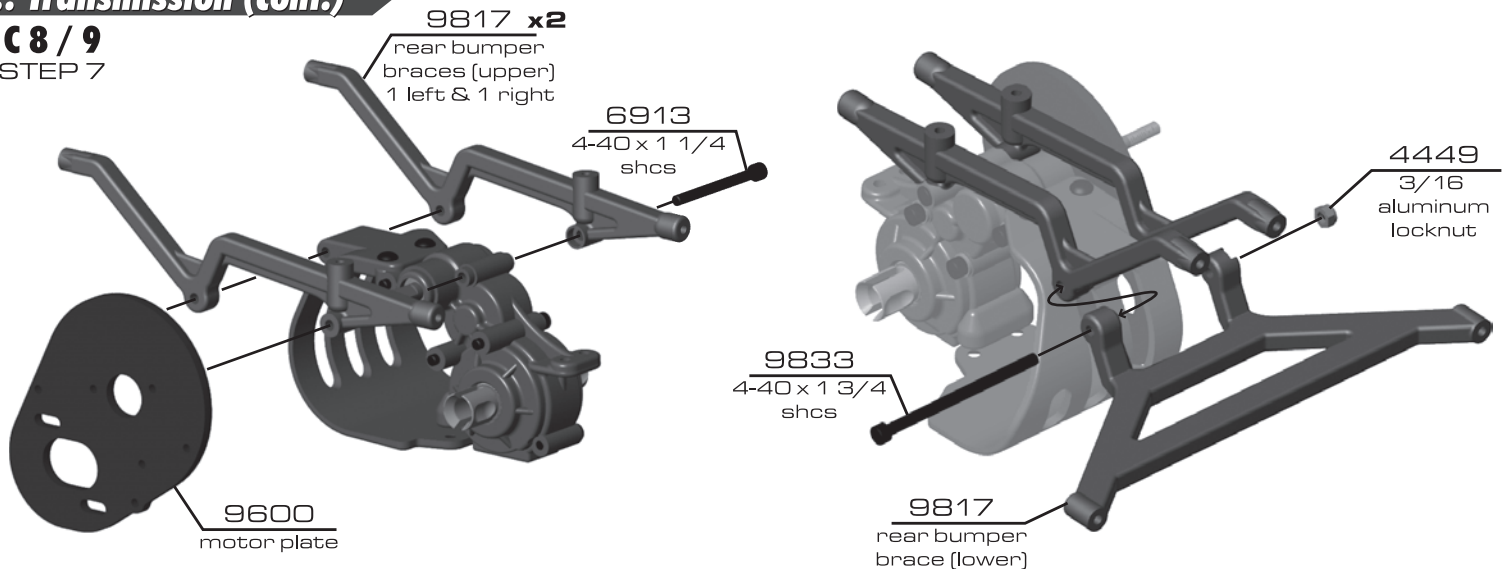



## :: Transmission (cont.)



**C 10**  
STEP 8

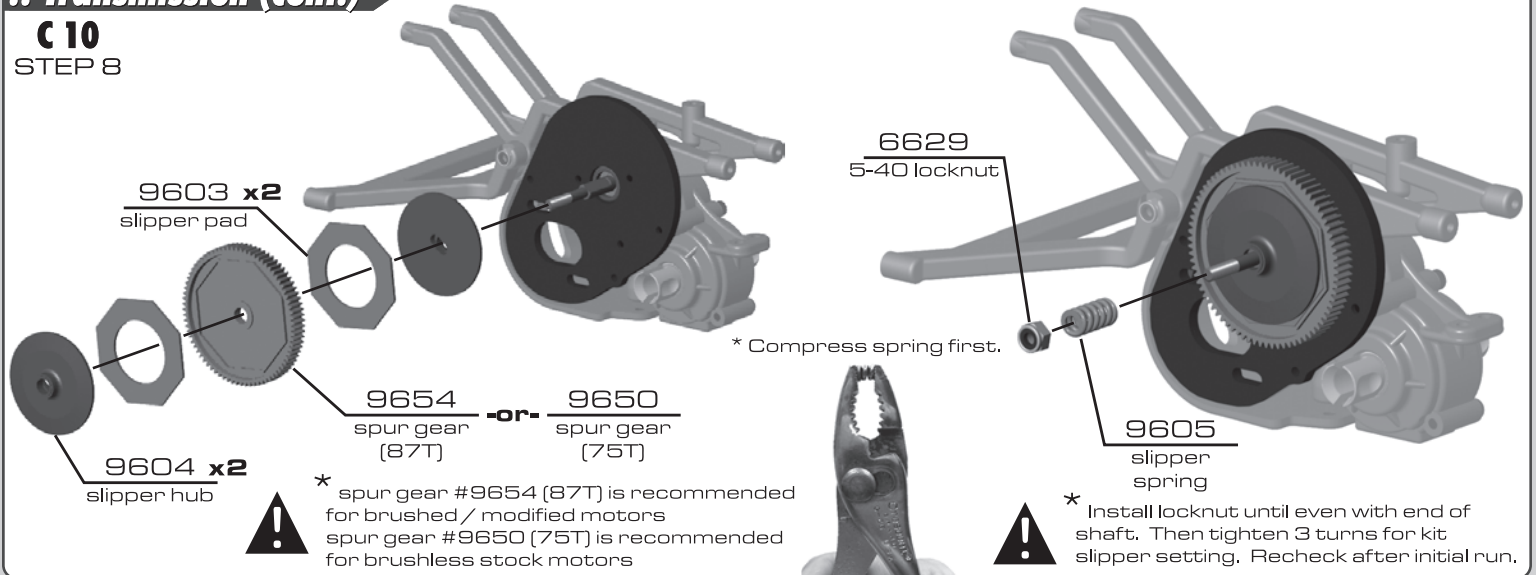

## :: Rear Arms



**BAG D**

**D 2**  
STEP 1

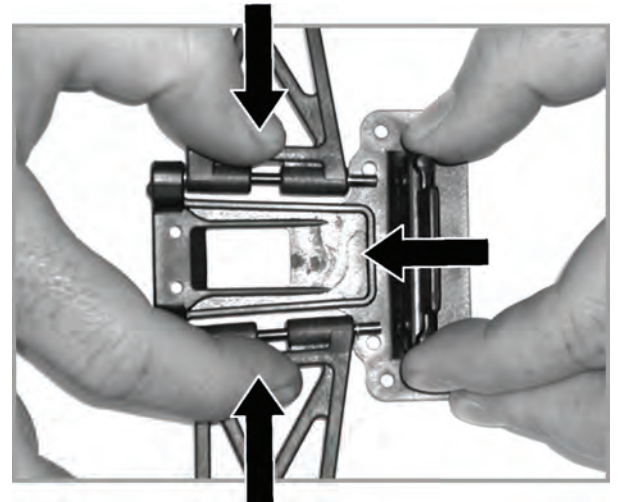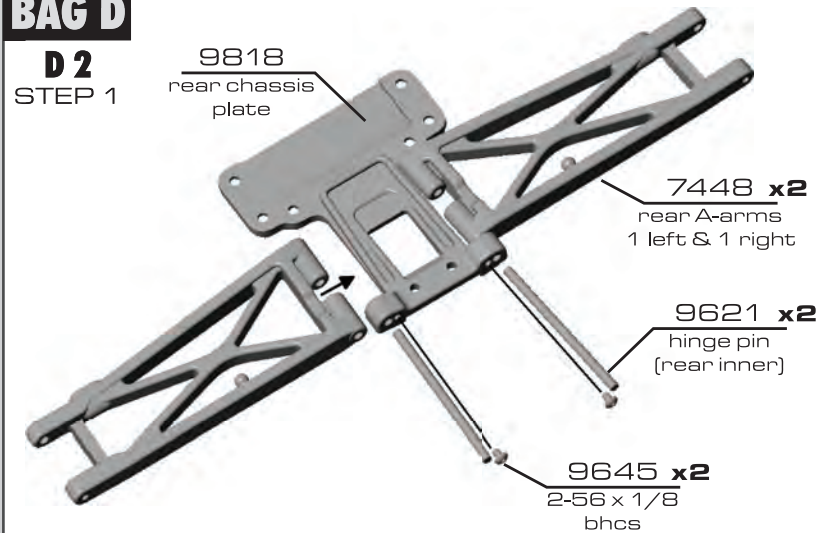



## :: Rear Arms (cont.)

**D 2**  
STEP 2

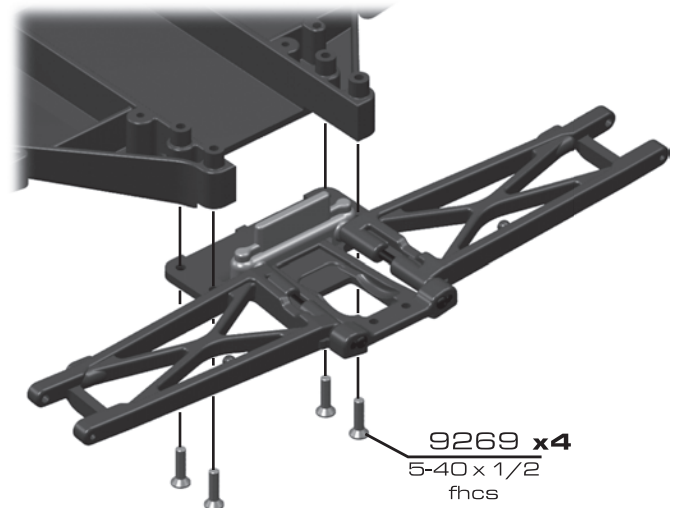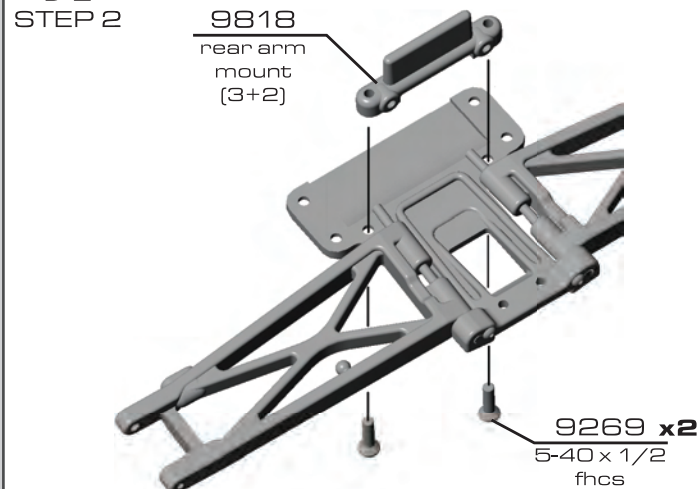


**:: Rear Brace****D 3**



STEP 3

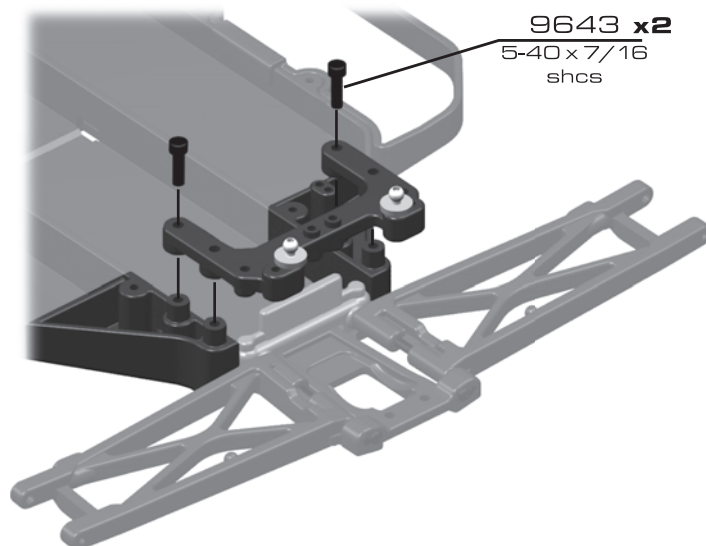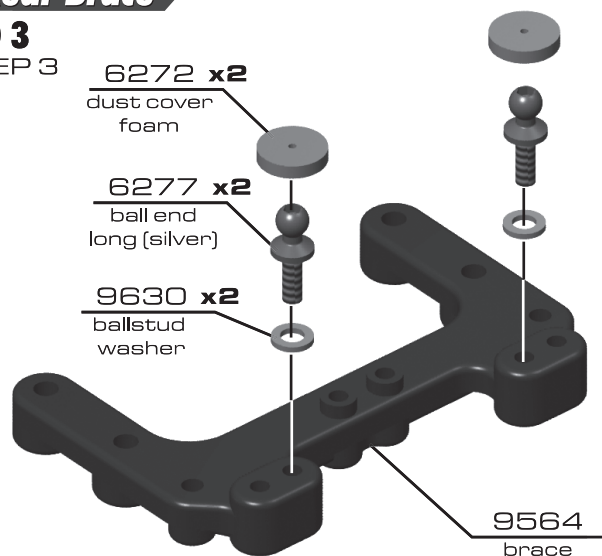**:: Rear Shock Tower****D 3**

STEP 4

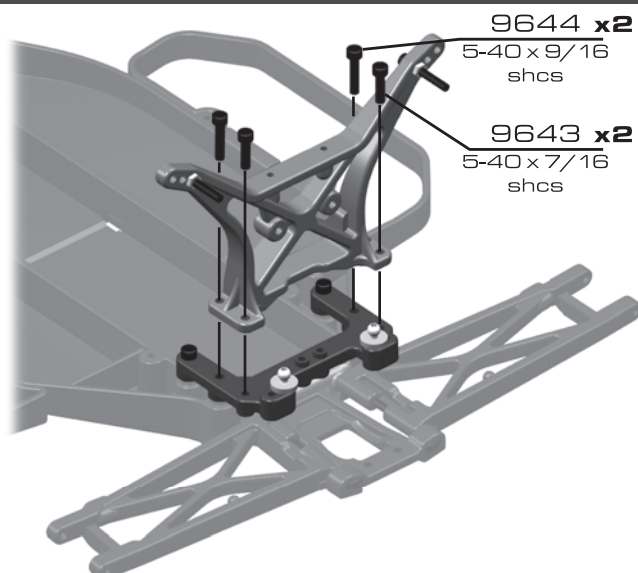**:: Transmission Install****D 4**



STEP 5

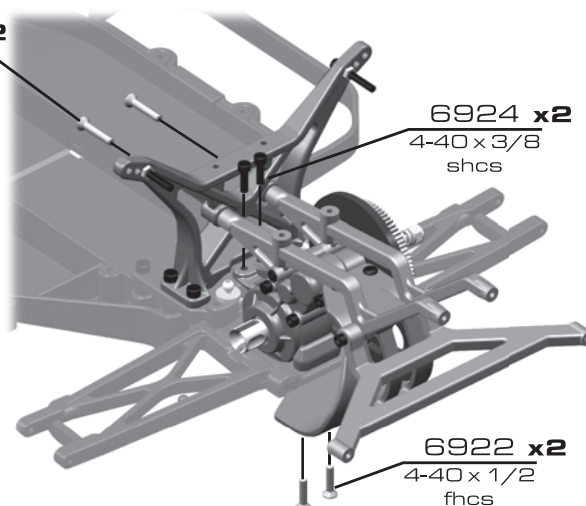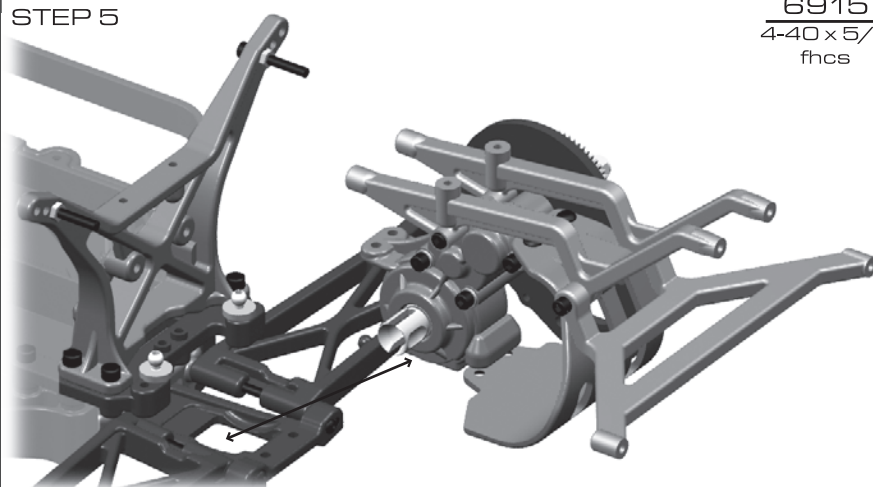





## :: Rear Upper Plate

**D 5**  
STEP 6

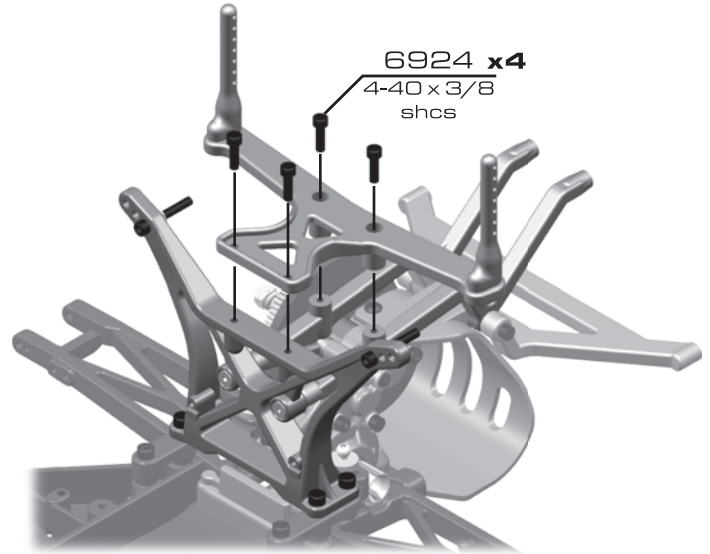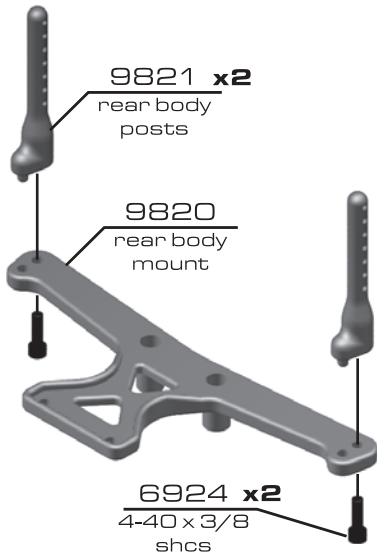

## :: Rear Bumper



**D 6**  
STEP 7

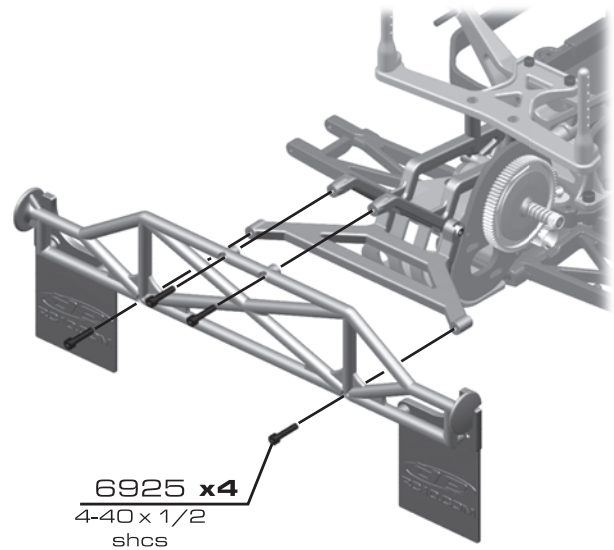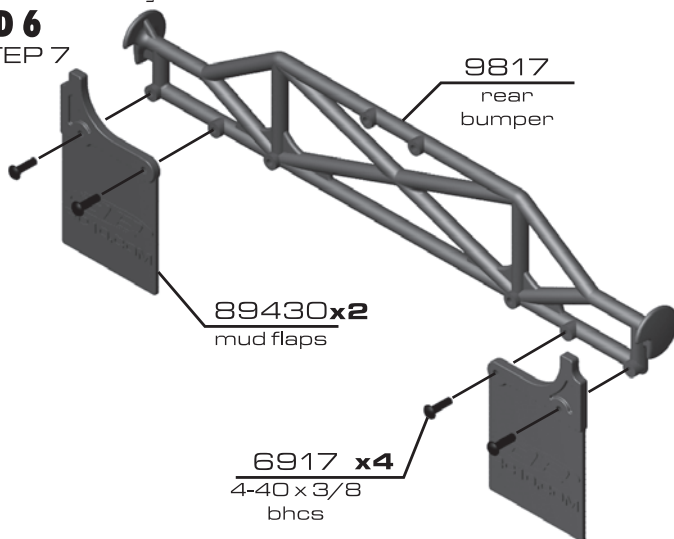

## :: Rear Hubs

**BAG E**



**E 2**  
STEP 1

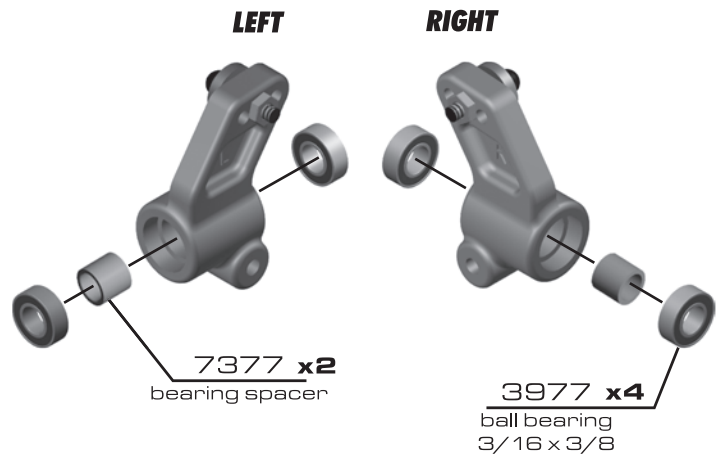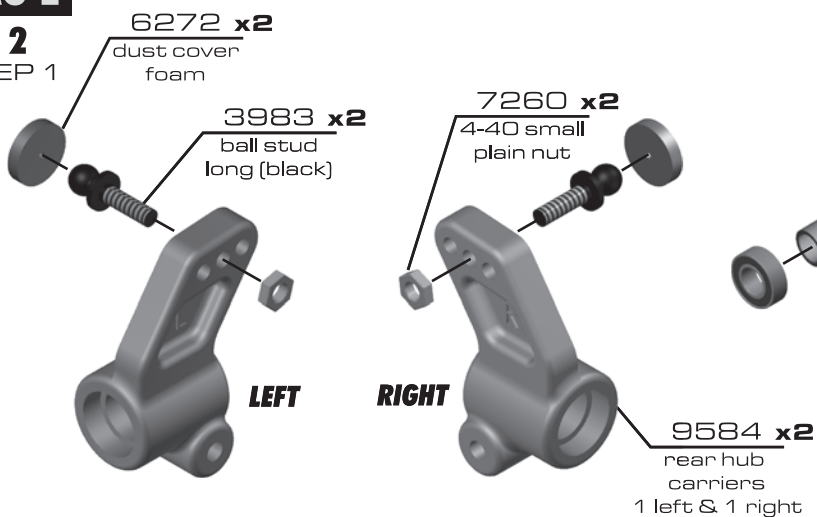

## :: Rear Hubs (cont.)

### E 3 / 4 / 5


#### STEP 2

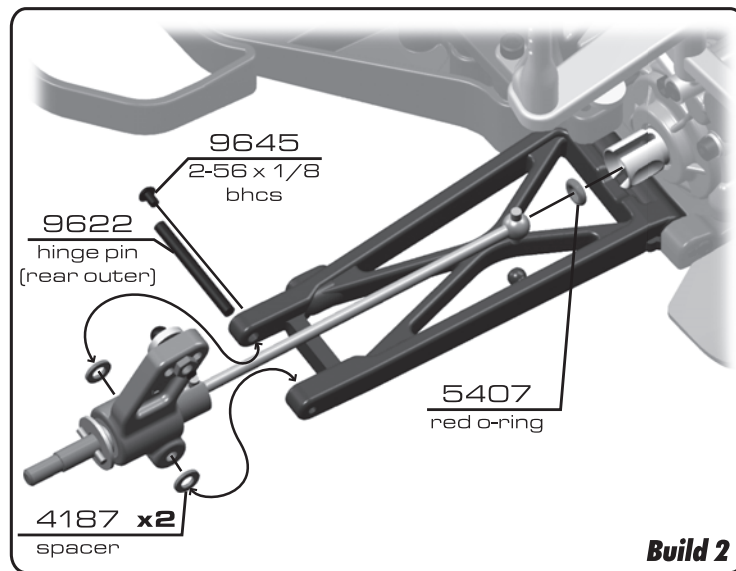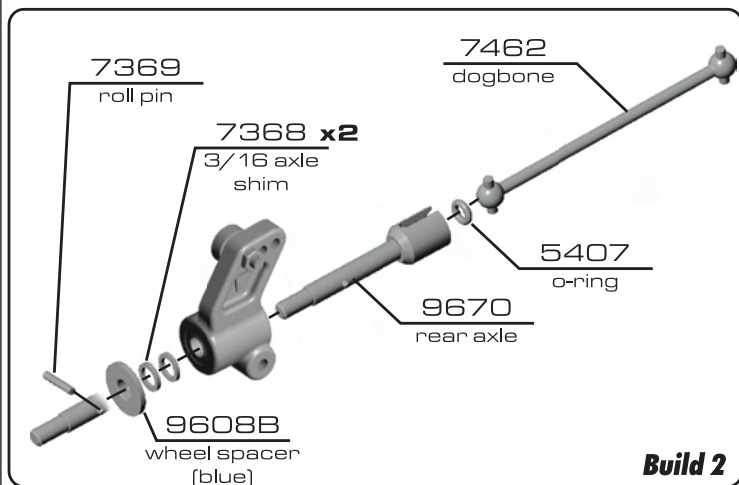



## :: Rear Camber Turnbuckle

### E 6

#### STEP 3

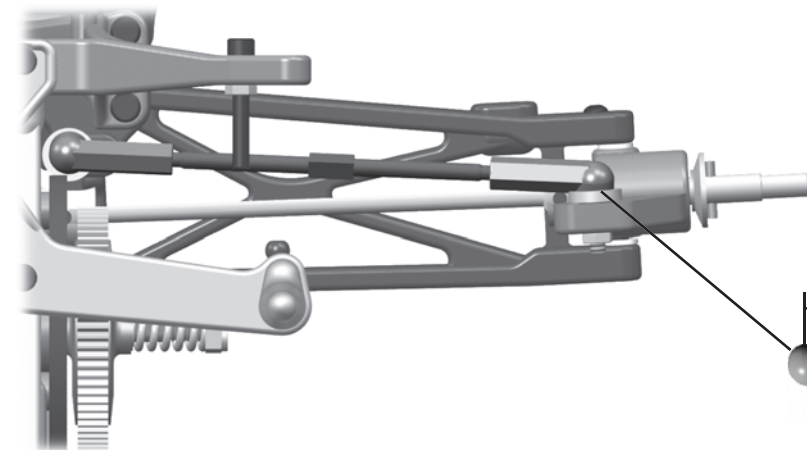

\* Orient the notch to the left throughout the car. It indicates which end has the left hand threads.



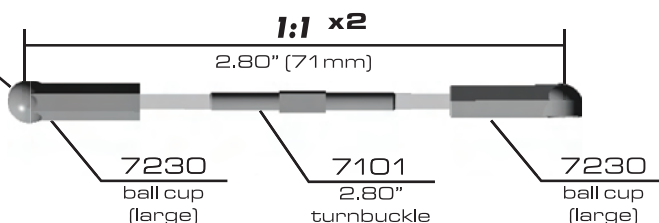



## :: Shocks

### BAG F

### F 2

#### STEP 1

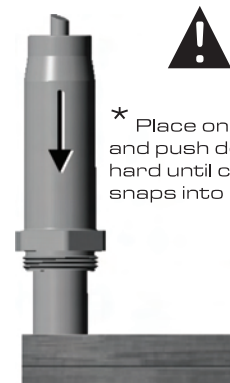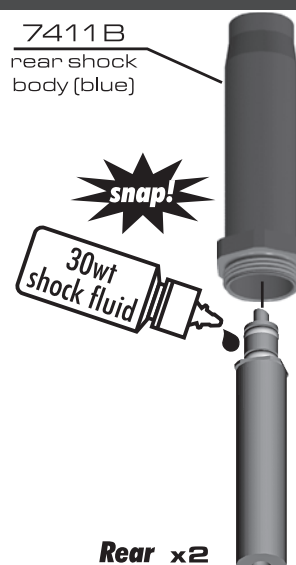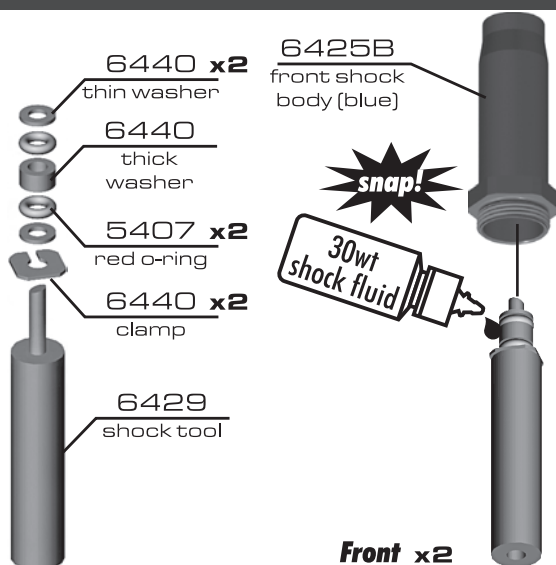

\* Place on table and push down hard until clamp snaps into place



## :: Shocks (cont.)

### F 2 / 3


#### STEP 2



## :: Shocks (cont.)


### F 3

#### STEP 3

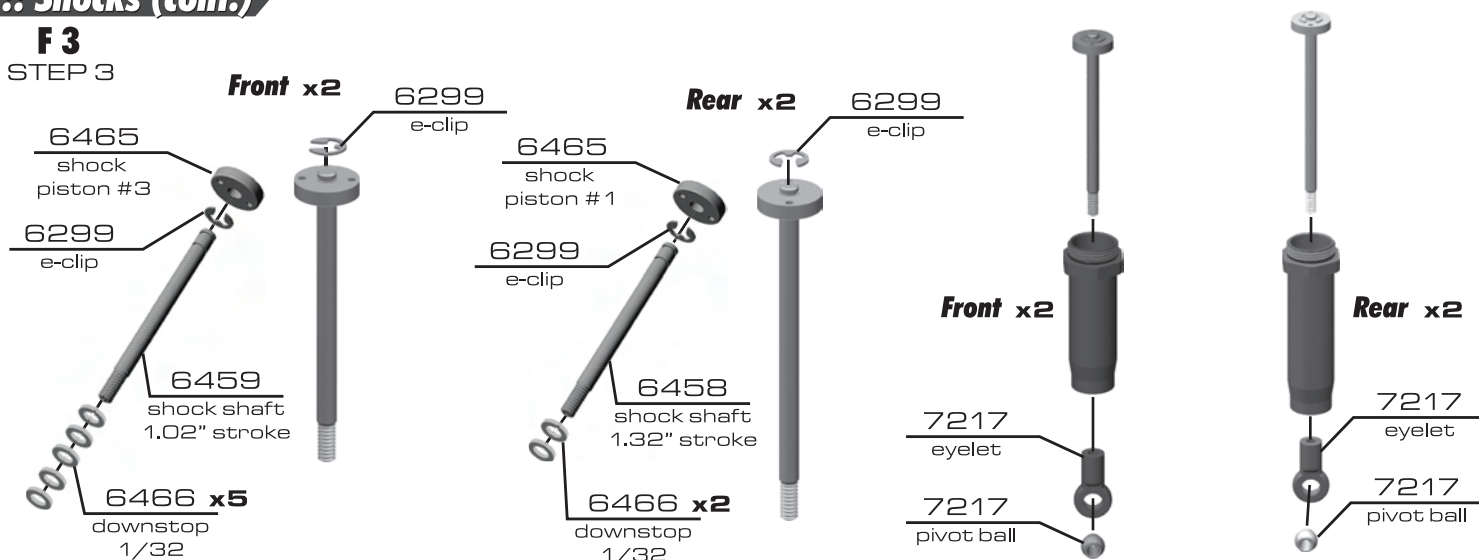


## :: Shocks (cont.)

#### STEP 4

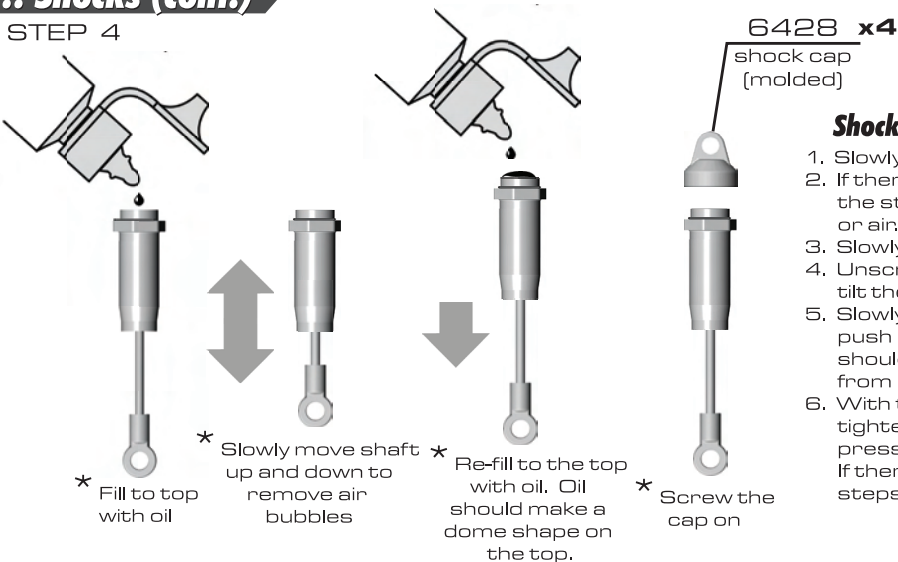

#### Shock Bleeding Steps:


1. Slowly compress the shaft.
2. If there is pressure at the top of the stroke, there is too much oil or air. You must bleed it out.
3. Slowly pull shaft out.
4. Unscrew the cap 3/4 turn and tilt the shock at a slight angle.
5. Slowly compress the shaft to push out excess oil and air. You should see bubbles coming out from under the cap.
6. With the shaft compressed, tighten the cap and re-check for pressure at the top of the stroke. If there is still pressure, repeat steps 3-5.

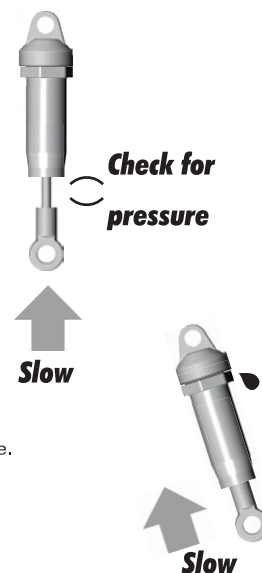

## **:: Shocks (cont.)**

**F 4 / 5**

## STEP 5

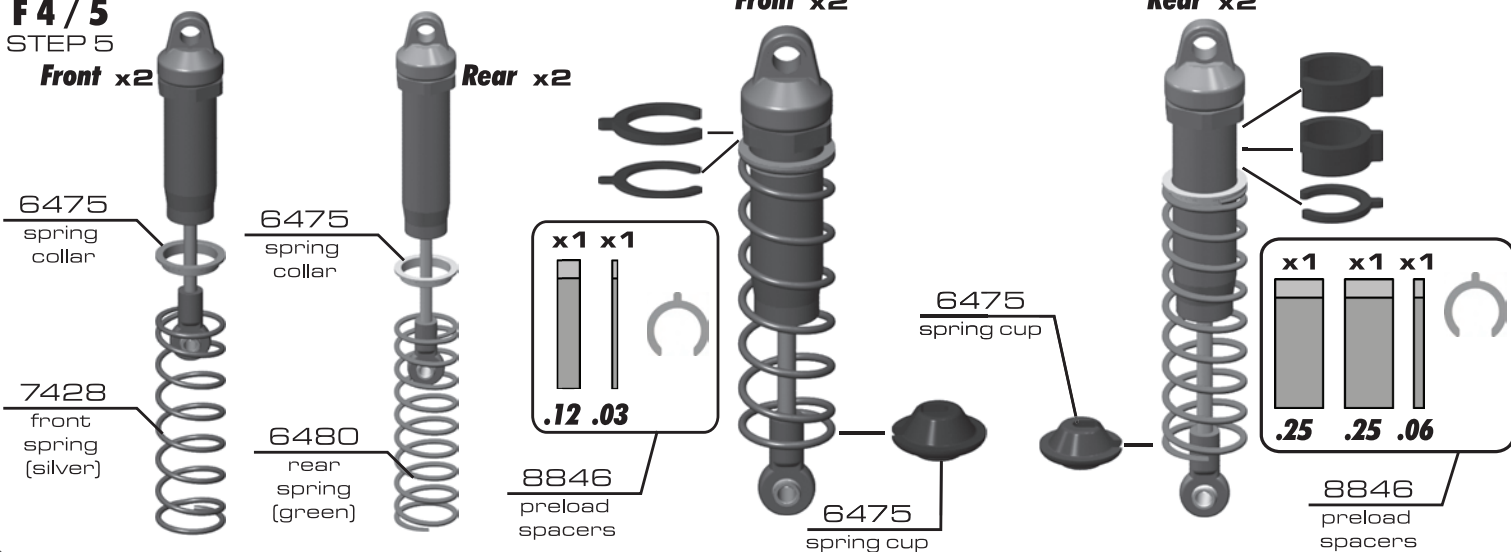**Front x2****Rear x2****Front x2****Rear x2**

## **:: Shocks (cont.)**

**F6**

## STEP 6

6473

shock bushing

6472  
shock  
mount  
nuts

6926  
4-40 x 5/8  
shcs


**Front x2**

6473

shock  
bushing

6472 shock  
mount  
nuts

6925  
4-40 x 1/2  
shcs

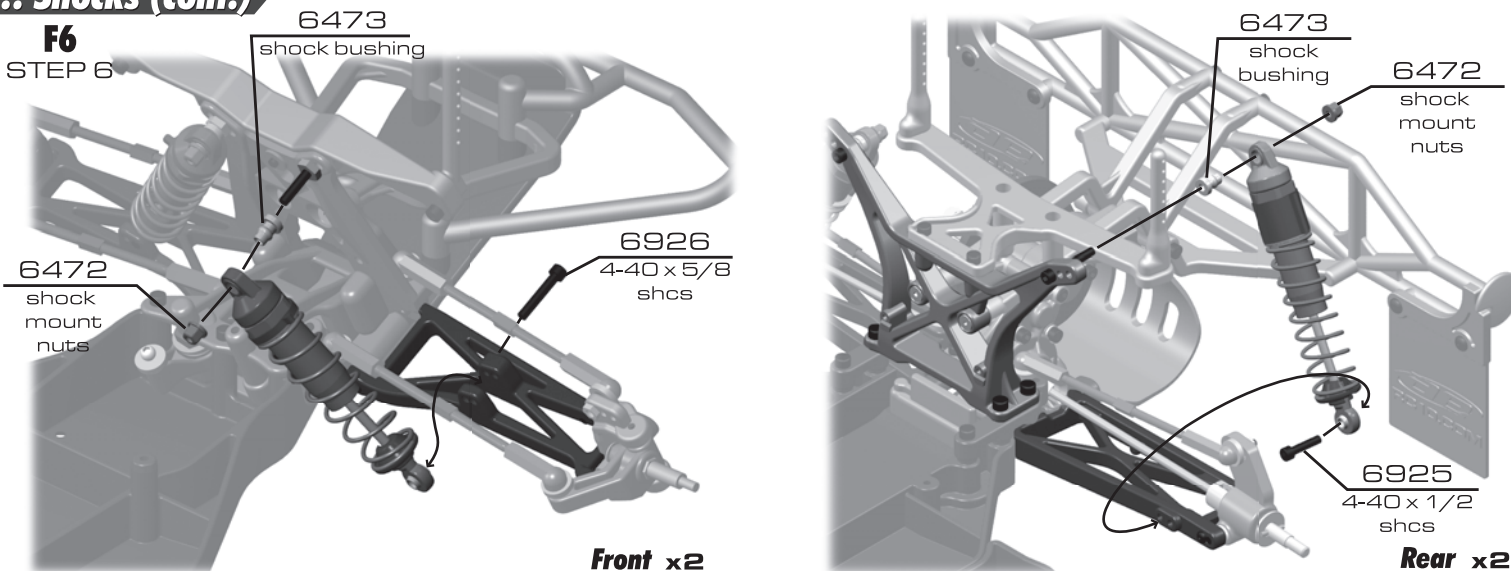**Rear x2**

## :: Steering Servo

# BAG G

G 2 / 3

### STEP 1

\*Servo not included in kit

6272  
dust cover  
foam

3981  
ball end  
short (black)


9180  
servo horn

7337 x4  
gold washer

6917 x4  
4-40 x 3/8  
bhcs

7336 x2  
servo  
mount

7336 **x2**  
servo  
spacers

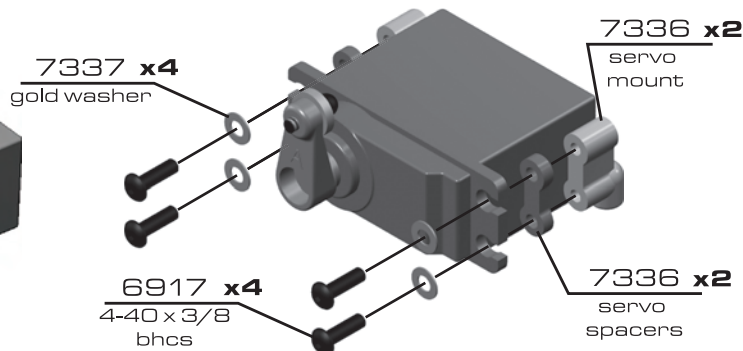

\* See page 20 for correct servo horn on the servo chart




\* See page 20 for correct servo spacing on the servo chart


## :: Steering Servo (cont.)

**G 4**

STEP 2

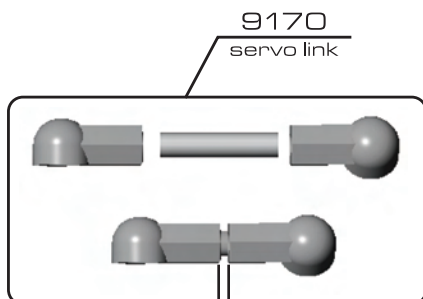


\*Leave a 1/16" gap

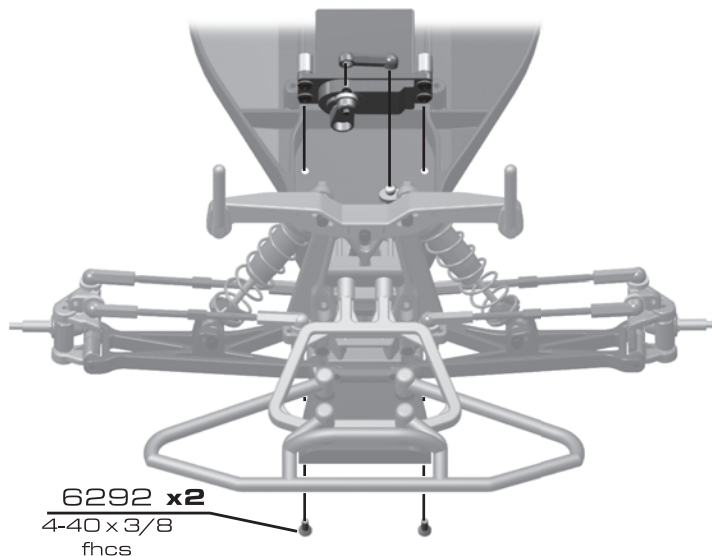



## :: Motor / Gear Cover

**G 5 / 6**

STEP 3

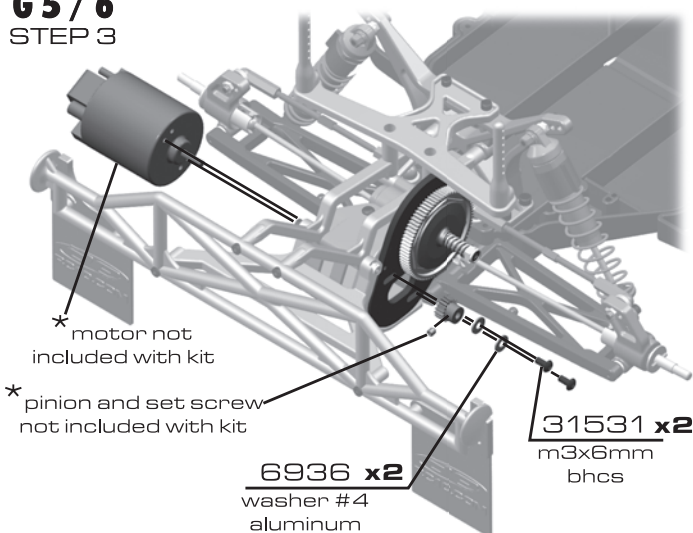


\* See page 18 for gear mesh setting instructions

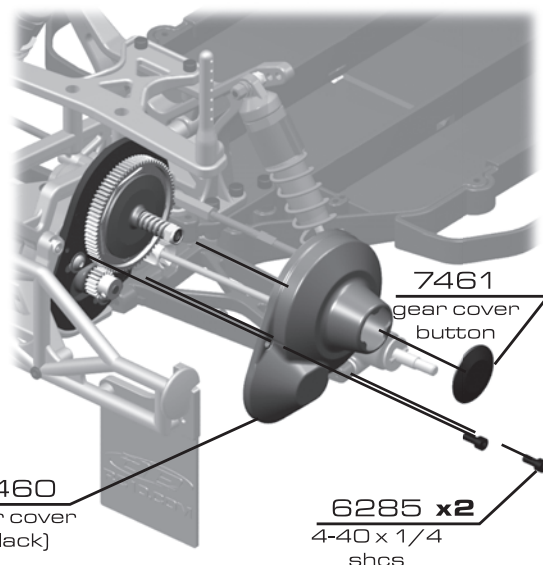

## :: Electronics / Battery Strap

**G 7 / 8**

STEP 4



\* receiver and electronic speed control not included with kit

 9814 x2  
thumb knob

 9814 x2  
4-40 x 1/2  
set screw



 9815  
foam  
spacer


gap

 \*leave a  
2.5mm gap




## :: Battery Strap (cont.)

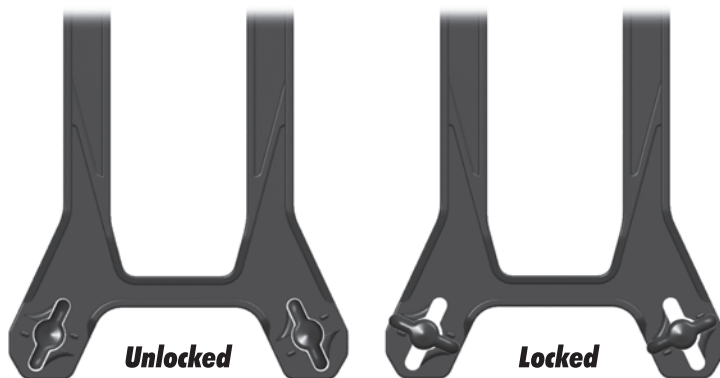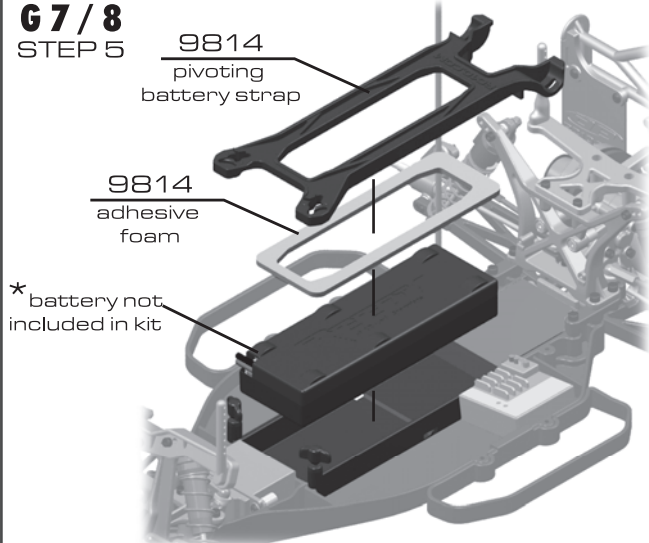
**G 7 / 8**
**STEP 5**


\* Move thumb screws to the unlocked position and lift the battery strap to remove your battery pack. Lock the thumb screws after you install your battery pack.


## :: Battery Strap (cont.)

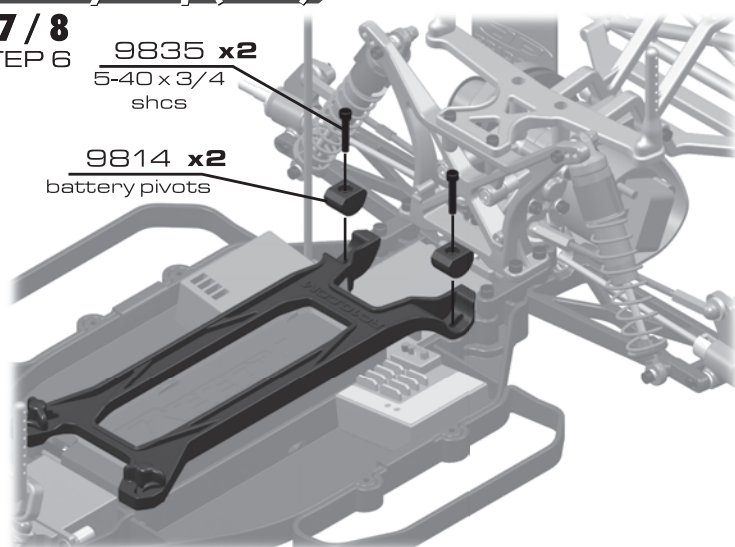**G 7 / 8**
**STEP 6**


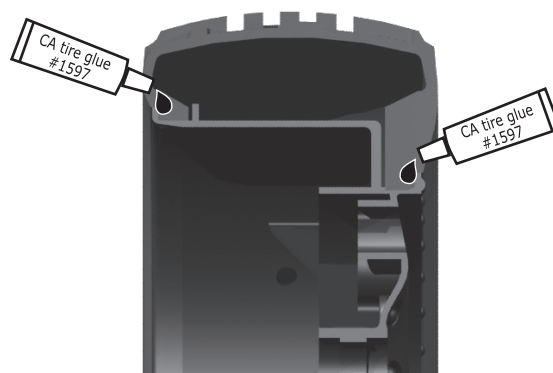
\* Leave a 1/16" gap between the battery pivots and the chassis.

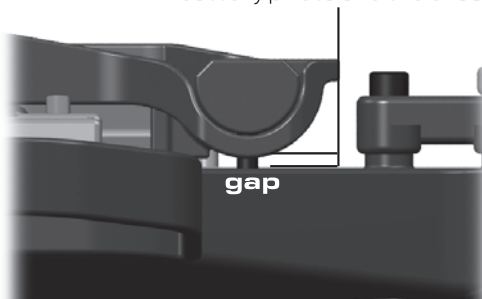

## :: Wheels and Tires

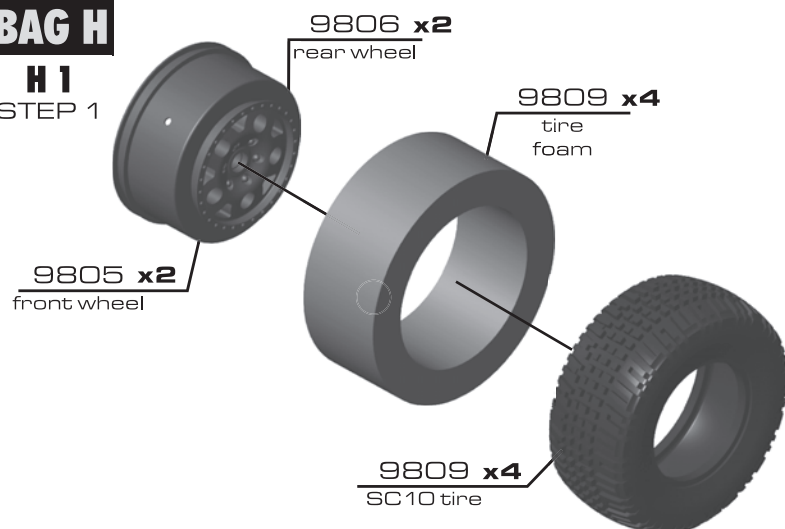**BAG H**
**H 1**
**STEP 1**


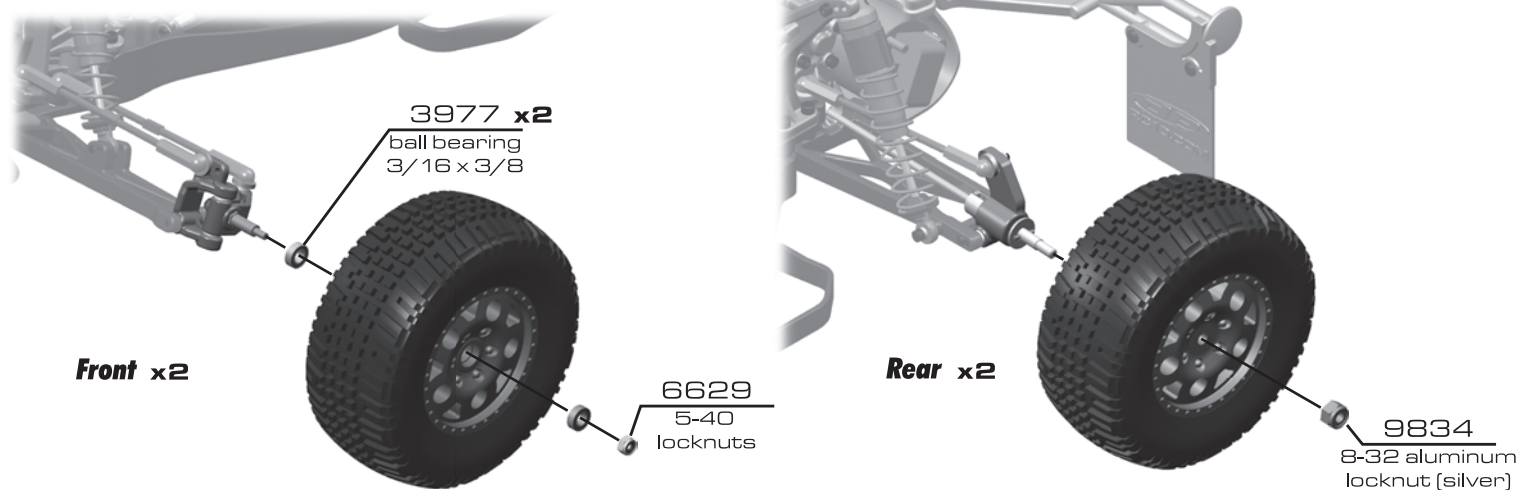
\* Use #1597 or equal cyanoacrylate glue to glue your tires to the wheels.



## :: Wheels and Tires

### H 2


#### STEP 2



## :: Body

### H 2


#### STEP 3

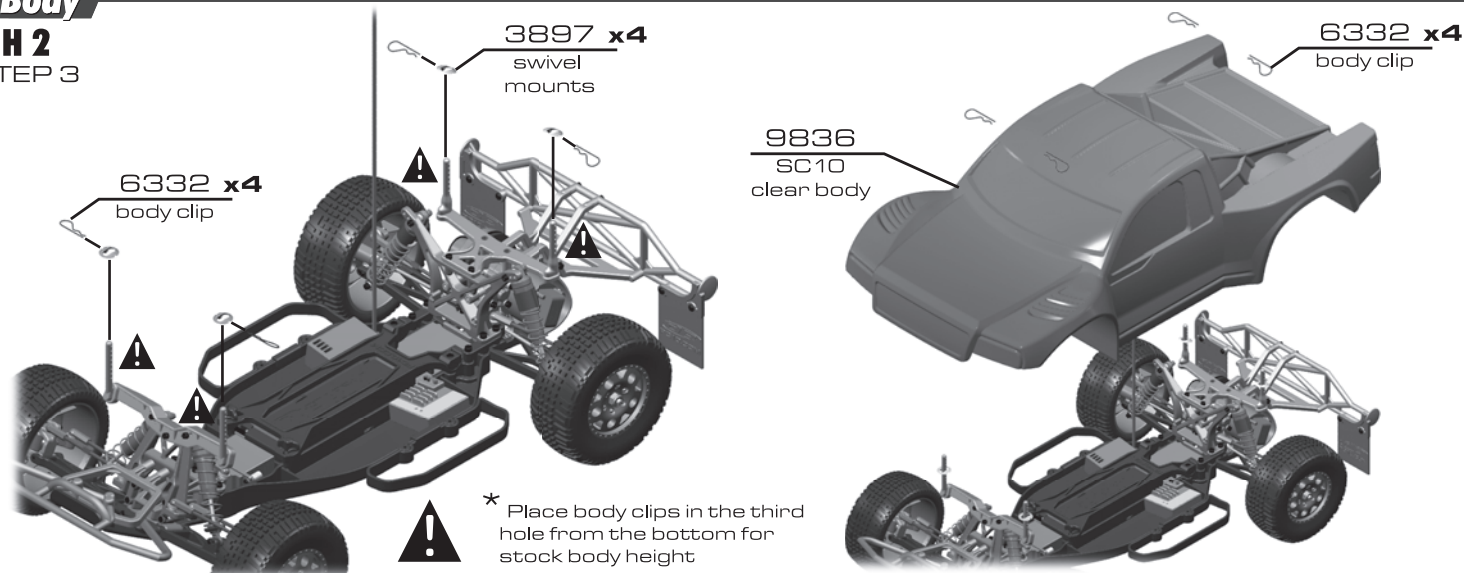

## :: Final Adjustments

Use the following steps to make the final adjustments on your truck.

1. Turn the transmitter on.
2. Make sure the motor is disconnected.
3. Connect your battery pack and turn the power switch on.
4. Move the steering control on the transmitter to the right and left. Do the wheels move in the correct direction? If not, you must reverse the steering servo direction on your transmitter (see transmitter manual).
5. Adjust your steering trim (see radio manual) until the steering rack is centered under the top plate. Then, using the two steering turnbuckles, adjust the front wheels so they are pointing straight ahead.
6. Adjust the ESC (electronic speed control) according to the speed control manufacturer's instructions. **Some manufacturers have the motor connected during adjustment and some do not.** Now turn the power switch off.
7. Connect the motor. Place your car on a block or car stand so that all four wheels are elevated. Turn the power switch on again. Check the throttle, brake, and steering settings you have made and then turn the power switch back off.
8. Remember this! The transmitter is always the **FIRST TO BE TURNED ON** and **THE LAST TO BE TURNED OFF.**

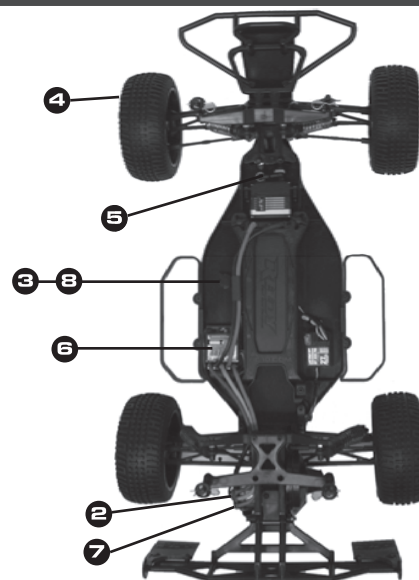


## :: Adjustments / Tips

### Motor Gearing:

Proper motor gearing will result in maximum performance and run time while reducing the chance of overheating and premature motor failure. The gear ratio chart lists recommended starting gear ratios for the most widely used motor types. Gear ratios will vary depending upon track conditions, driving style, and personal preference. Generally, you should not increase the pinion gear size more than one tooth greater than the starting size.

**SC10 Gear Ratio Chart**

MOTOR	Pinion	Spur	FDR
27T Stock Motor	19	87	11.91:1
19T Super Stock Motor	19	87	11.91:1
17T Modified Motor	24	87	9.43:1
15T Modified Motor	22	87	10.28:1
14T Modified Motor	21	87	10.77:1
17.5 Brushless Motor	28	75	6.96:1
13.5 Brushless Motor	26	75	7.50:1
10.5 Brushless Motor	24	87	9.42:1

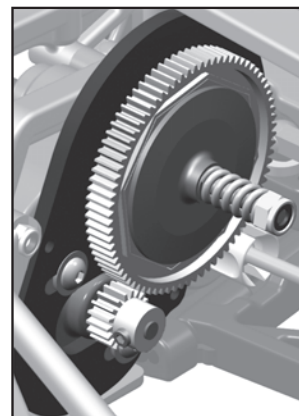

### Set The Gear Mesh

You should be able to rock the spur gear back and forth in the teeth of the pinion gear without making the pinion gear move. If the spur gear mesh is tight, then loosen the #31531 screws and move the motor away, then try again. A gear mesh that is too tight or too loose will reduce power and damage the gear teeth.

## MAINTENANCE

### Check For Fit

Periodically check all moving suspension parts. Suspension components must be kept clean and move freely without binding to prevent poor and/or inconsistent handling.

### Motor Maintenance

Brushed motors require frequent maintenance to keep performance levels at their maximum. Between runs and after letting the motor cool completely, inspect the brushes to ensure that they are moving freely in their holders. Remove the springs and slide the brushes in and out of their holders checking for any resistance or rough spots. If found, remove the brush and carefully wipe it clean. Removing buildup will allow the brush to slide freely and create maximum contact with the commutator resulting in maximum power output.

After every 3-5 runs, remove the brushes from their holders and inspect the tips for wear or burning. If there is noticeable wear (less than 75% of the brush remaining), replace the brush with a new pair. If the tips become a burned blue color, the lubricant in the brush has been burned away and new brushes should be installed.

Occasionally, the motor should be cleaned with a soft brush to prevent dirt build up around the brush hood area and ball bearings. At this time, it is a good idea to add one drop of bushing/bearing oil to each bushing or ball bearing.

If using a brushless motor, please refer to the motor manufacturer's guidelines for proper maintenance.

### Slipper Clutch

The assembly instructions give you a base setting for your clutch. Turn the nut on the shaft so that the end of the top shaft is even with the outside of the nut. Tighten the nut 3 more turns. At the track, tighten or loosen the nut in 1/8 turn increments until you hear a faint slipping sound for 1-2 feet on takeoffs.

Another popular way to set the clutch is to hold both rear tires firmly in place and apply short bursts of throttle. If the clutch is properly set, the front tires should lift slightly up off the surface.



## :: Adjustments / Tips

### Front Camber Links

Changing the length of the camber link is considered a bigger step than adjusting the ball end height on the tower. Shortening the camber link (or lowering the ball end) will give the front end less roll and quicken steering response. Lengthening the camber link (or raising the ball end) will give the front more roll and slower steering response.

Longer camber links are typically used on high grip tracks and shorter links tend to work better on medium-grip loose tracks.



\* Raise or lower the ball end by adding or subtracting washers here

### Caster

Caster describes the angle of the kingpin as it leans toward the rear of the vehicle. Positive caster means the kingpin leans rearward at the top. The supplied 25° caster blocks (#7919) are recommended in most cases. For more corner entry steering and less exit steering, try the optional 30° blocks (#7922).

### Front Camber

Camber describes the angle at which the tire and wheel rides when looked at from the front. Negative camber means that the tire leans inward at the top.

A good starting camber setting is -1°. Use the included #1719 camber gauge to set your camber. Positive camber, where the top of the tire is leaning out, is not recommended.



\* Testing camber with camber gauge

### Rear Camber Link

Changing the length of the camber link is considered a bigger step than adjusting the ball end height on the rear chassis brace. Shortening the camber link (or lowering the ball end) will give the rear end less roll and the car will tend to accelerate or "square up" better. Lengthening the camber link (or raising the ball end) will give the rear more roll and more cornering grip. Longer camber links are typically used on high grip tracks, while shorter links tend to work better on med-grip loose tracks. The kit setting is the best compromise of cornering grip and acceleration.




\* Raise or lower the ball end by adding or subtracting washers here

### Rear Camber

Camber describes the angle at which the tire and wheel rides when looked at from the back. Negative camber means that the tire leans inward at the top. A good starting camber setting is -1°. Use the included #1719 camber gauge to set your camber. Adding a small amount of positive camber, where the top of the tire is leaning out, will tend to improve straight-line acceleration on loose tracks.


### Ride Height

Ride height is the distance from the ground to the bottom of the chassis. The standard front ride height setting is with the front arms level (referred to as "arms level"). Check the ride height by lifting up the entire car about 8-12 inches off the bench and drop it. After the suspension "settles" into place, add or remove pre-load clips so that the left & right arms appear to be level.

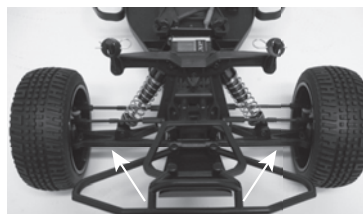

\* Front arms should be in a straight line when ride height is set at "arms level"


The rear ride height setting you should use most often is with the outdrive, driveshaft, and axles all on the same imaginary horizontal line (referred to as "bones level"). Check the ride height by lifting up the entire car about 8-12 inches off the bench and drop it. After the suspension "settles" into place, add or remove pre-load clips so that the left & right driveshafts appear to be level.

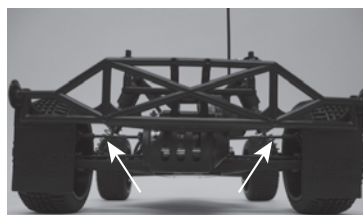

\* Dogbones should be in a straight line when ride height is set at "dogbones level"

### Wheelbase Adjustment

You have three options for rear hub spacing, Forward, Middle, & Back. The kit setting provides the most rear traction, and will be used most often. For improved handling in bumps or rhythm sections, try moving the hubs to the Middle or Back position. This can also make the car handle better in 180° turns.














\* Spacers to the rear will place hubs forward, shortening the wheelbase

### Anti-Roll bar



The optional #9635 rear anti-roll bar kit (also called the "swaybar") allows you to add roll resistance to the rear end with minimal effect on handling over bumps and jumps. It is an especially helpful tuning item on high-grip tracks (try the gold bar). The silver and black anti-roll bars are typically used on medium-grip loose tracks.

## :: Hardware - 1:1



## socket head (shcs)

	4-40 x 1/4 (6285)
	4-40 x 3/8 (6924)
	4-40 x 1/2 (6925)
	4-40 x 3/4 (6927)
	4-40 x 7/8 (7738)
	4-40 x 1 (6928)
	4-40 x 1 1/4 (6913)
	4-40 x 1 3/4 (9833)
	5-40 x 7/16 (9643)
	5-40 x 9/16 (9644)
	5-40 x 3/4 (9835)






## setscrews

	4-40 x 1/2 (9814)
	5-40 x 1/8 (3862)

## ball bearings

	3/16 x 3/8 (3977)
	10 x 16mm (9832)







## flat head (fhcs)

	2.5x6mm (9828)
	4-40 x 3/8 (6292)
	4-40 x 1/2 (6922)
	4-40 x 5/8 (6915)
	5-40 x 1/2 (9269)

## shims &amp; washers

	ballstud washer (9630)
	.03 nylon washer (4187)
	gold washer (7337)
	3/16 axle shim (7368)
	#4 aluminum washer (6936)
	5 x 9.5mm shim (9830)
	servo saver shim (9610) [lower]
	servo saver shim (9610) [upper]
	5 x 14mm shim (9829)







## button head (bhcs)

	2-56 x 1/8 (9645)
	2-56 x 5/16 (4334)
	4-40 x 5/16 (6919)
	4-40 x 3/8 (6917)
	4-40 x 7/16 (2221)
	3x6mm (31531)

## ballstuds

	black .200" (3981)
	black .300" (3983)
	silver .200" (6276)
	silver .300" (6277)


## nuts (lock/plain)

	4-40 small plain nut (7260)
	3/16 aluminum locking nut (4449)
	shock mount nut (6472)
	4-40 nut (6295)
	5-40 lock nut (6629)
	8-32 aluminum lock nut (9834)

## Servo Chart

1

FIND YOUR SERVO TYPE



2

FIND YOUR SPACER(S)




3

SELECT YOUR SERVO HORN



1

**STEERING SERVO TYPE**  
(Steering servo is sold separately)  
**NOT ALL SERVOS ARE LISTED**



2

**#7336  
SPACER**




3

**#9180  
SERVO  
ARM**




<b>Airtronics</b> 94102	no spacer	<b>A</b>
<b>Airtronics</b> 94738, 94157, 94158, 94257, 94258, 94357, 94358, 94452, 94453, 94751, 94755	thick spacer	<b>A</b>
<b>Hitec</b> HS-5625MG, HS-5645MG, HS-625MG, HS-645MG	no spacer	<b>H</b>
<b>Hitec</b> HS-303, HS-300BB, HS-945MG, HS-925MG, HS-5945MG, HS-5925MG, HS-525MG, HS-525BB, HS-425BB, HS-422	thin spacer	<b>H</b>
<b>JR</b> Z4725, Z4750, Z2750, Z8450, Z8550, NES-4750	no spacer	<b>J</b>
<b>JR</b> Z250, Z550	thin spacer	<b>J</b>
<b>Futaba</b> S9204, S9250, S9450, S148	no spacer	<b>F</b>
<b>Futaba</b> S3003, S9202, S9101	thin spacer	<b>F</b>
<b>Futaba</b> S9404	thick spacer	<b>F</b>
<b>KO</b> PS-401, PS-2001, PS-2004, PS-2015, PS-2173, PS-2174, PS-2123, PS-2143, PS-2144	thin spacer	<b>J</b>

## :: Front End

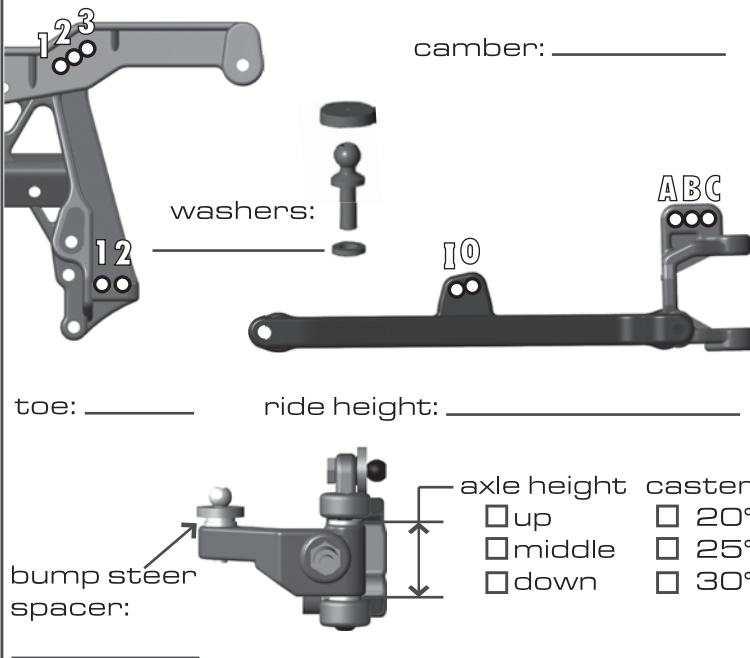

## :: Rear End

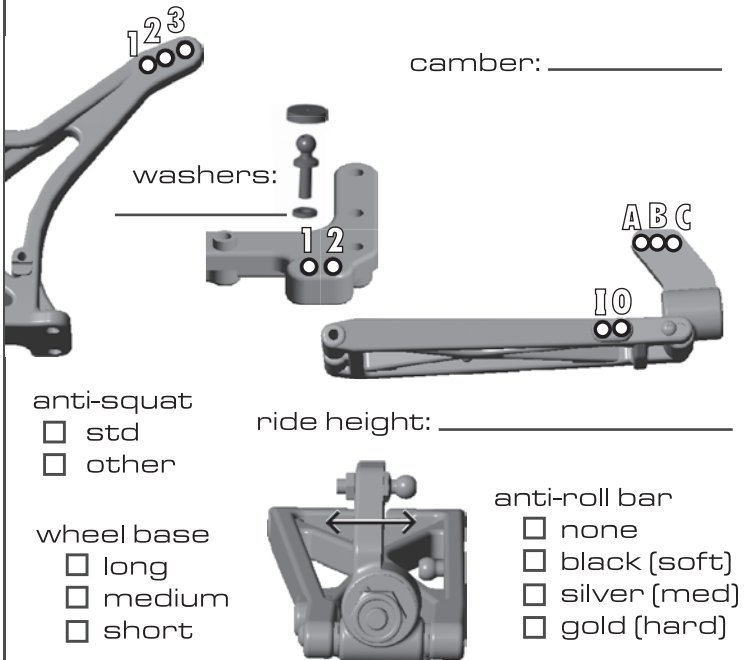

## :: Front Shocks

spring: \_\_\_\_\_ piston: \_\_\_\_\_  
shock oil: \_\_\_\_\_ limiter: \_\_\_\_\_

## :: Rear Shocks

spring: \_\_\_\_\_ piston: \_\_\_\_\_  
shock oil: \_\_\_\_\_ limiter: \_\_\_\_\_

## :: Electronics

motor & wind: \_\_\_\_\_  
pinion: \_\_\_\_\_  
spur gear: \_\_\_\_\_  
esc: \_\_\_\_\_ setting: \_\_\_\_\_  
batteries: \_\_\_\_\_  
battery placement: \_\_\_\_\_

## :: Transmitter

radio: \_\_\_\_\_  
steering expo: \_\_\_\_\_  
brake e.p.a.: \_\_\_\_\_  
throttle expo: \_\_\_\_\_  
servo: \_\_\_\_\_  
initial brake: \_\_\_\_\_ drag brake: \_\_\_\_\_

## :: Other

body: \_\_\_\_\_  
notes: \_\_\_\_\_

## :: Gear Differential

fluid: \_\_\_\_\_

## :: Front Tires

tire: \_\_\_\_\_  
compound: \_\_\_\_\_  
insert: \_\_\_\_\_  
wheel: \_\_\_\_\_

## :: Rear Tires

tire: \_\_\_\_\_  
compound: \_\_\_\_\_  
insert: \_\_\_\_\_  
wheel: \_\_\_\_\_

## :: Race and Vehicle Comments

qualify: \_\_\_\_\_ main: \_\_\_\_\_ finish: \_\_\_\_\_ tq: ☐  
comments: \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

## :: Track Info

smooth: ☐ bumpy: ☐ blue groove: ☐  
traction: ☐ high ☐ med. ☐ low  
soft dirt: ☐ grass: ☐ clay: ☐ wet: ☐  
dusty: ☐ other: \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_





***Associated Electrics, Inc.***  
***26021 Commercentre Dr.***  
***Lake Forest, CA 92630 USA***  
***<http://www.TeamAssociated.com>***  
***<http://www.RC10.com>***