

# BLACKBOX 850R

## ELECTRONICS SET-UP SHEET

Voltage input:	2S - 6S LiPo
On resistance (Ω)	0.36
Continuous current (A)	150
Dimensions (mm)	56 x 46 x 37
Weight w/o wires & fan (g)	131
Motor limit	4S - 3000kV, 6S - 2400kV
BEC	6.0 - 7.4V / 5A

DRIVER: \_\_\_\_\_ EVENT: \_\_\_\_\_ TRACK: \_\_\_\_\_ DATE: \_\_\_\_\_

VEHICLE: \_\_\_\_\_ CONDITIONS: \_\_\_\_\_ BATTERY: \_\_\_\_\_ TEMP: \_\_\_\_\_

### ESC INFO

FIRMWARE:

WIRE SIZE:

### MOTOR POWER

4A TIMING LEVEL:

### BRAKE

1A DRAG BRAKE:

1B BRAKE STRGTH:

1C INIT BRAKE:

1D BRAKE FREQ:

1E BRAKE PUNCH:

### MISC CONTROL

5A RUN MODE:  F/B  F/B/R

5B REVERSE PWR:  25%  50%  75%  100%

5C BATT CUTOFF:  NONE  3.2V/CELL  3.4V/CELL

5D ESC TEMP CUT:  OFF  212F/100C

5E MOT ROTATION:  NORMAL  REVERSE

5F BEC VOLTAGE:  6.0V  7.4V

### THROTTLE

3A PUNCH CTRL:

3B DRIVE FREQ:

3C DEAD BAND:

### RADIO SETTINGS

THROTTLE EPA:

BRAKE EPA:

THROTTLE EXPO:

BRAKE EXPO:

### MOTOR SETTINGS


MOTOR:

KV RATING:

ROTOR:

FDR/ROLLOUT:

TEMPERATURE:

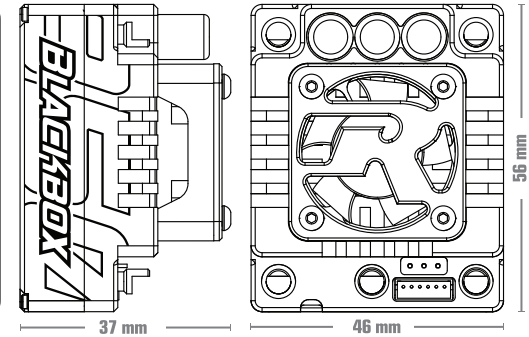

NOTES:

---



---



---



---



---



---



twitter.com/ReedyPower

www.ReedyPower.com

instagram.com/ReedyPower

facebook.com/ReedyPower

