

BLACKBOX 610R

ELECTRONICS SET-UP SHEET

| | |
|----------------------------|--------------------|
| Voltage input: | 2S LiPo |
| On resistance (Ω) | 0.00043 |
| Continuous current (A) | 160 |
| Dimensions (mm) | 38.5 x 36.9 x 19.5 |
| Weight w/o wires & fan (g) | 45 |
| Motor limit | 4.5T |
| BEC | 6.0 - 7.4V / 5A |
| Fan | Optional |

DRIVER: Jesper Rasmussen EVENT: Danish Nats RD1 indoor TRACK: City2 DATE: 27/10 24
 VEHICLE: A800R CONDITIONS: Medium grip, Carpet BATTERY: Reedy 6000 TEMP: 24

ESC INFO

FIRMWARE:

CAPACITOR TYPE:

FAN:

WIRE SIZE:

BRAKE

1A DRAG BRAKE:

1B BRAKE STRGTH:

1C INIT BRAKE:

1D BRAKE FREQ:

1E BRAKE PUNCH:

1F BRAKE MODE:

THROTTLE

3A PUNCH CTRL:

3B INIT THROTTLE:

3C DRIVE FREQ:

3D DEADBAND:

3E CURRENT LIMIT:

MOTOR POWER

EXPERT

4A BT SOFT PWR:

4B BT SOFT RNG:

4C COAST VALUE:

4D BOOST TIMING:

4E BOOST TIM ACT:

4F BOOST ST RPM:

4G BOOST END RPM:

4H TURBO TIMING:

4J TURBO DELAY:

4K SLEW RATE:

4L RELEASE RATE:

STANDARD

5A TIMING LEVEL:

RADIO SETTINGS

THROTTLE EPA:

BRAKE EPA:

THROTTLE EXPO:

MISC CONTROL

6A RUN MODE: F/B F/B/R

6B REVERSE PWR: 25% 50% 75% 100%

6C BATT CUTOFF: NONE 3.2V/CELL 3.4V/CELL

6D ESC TEMP CUT: OFF 221F/105C 257F/125C

6E MOT ROTATION: NORMAL REVERSE

6F BEC VOLTAGE:

MOTOR SETTINGS

MOTOR:

WIND:

TIMING:


ROTOR:

FDR/ROLLOUT:

MISCELLANEOUS

SERVO:

CHARGER:

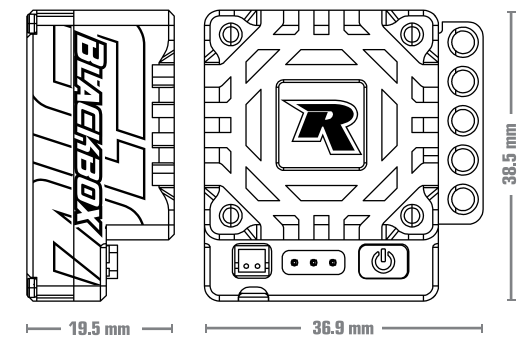

NOTES:

Control motor in Super Stock

