

BLACKBOX 880R

ELECTRONICS SET-UP SHEET

Voltage input	2S - 4S LiPo
On resistance (Ω)	0.00043
Continuous current (A)	180
Peak current (A)	700
Dimensions (mm)	54 x 37 x 23
Weight w/o wires & fan (g)	45
Motor limit (4S)	2400kV
BEC	6.0-7.4V/5A
Fan	30mm included

DRIVER: _____ EVENT: _____ TRACK: _____ DATE: _____

VEHICLE: _____ CONDITIONS: _____ BATTERY: _____ TEMP: _____

ESC INFO

FIRMWARE: _____
WIRE SIZE: _____

BRAKE

1A DRAG BRAKE: _____
1B BRAKE STRGTH: _____
1C INIT BRAKE: _____
1D BRAKE FREQ: _____
1E BRAKE PUNCH: _____
1F BRAKE MODE: _____

THROTTLE

3A PUNCH CTRL: _____
3B INIT THROTTLE: _____
3C DRIVE FREQ: _____
3D DEADBAND: _____
3E CURRENT LIMIT: _____

MOTOR POWER

☐ **EXPERT**
4A BT SOFT PWR: _____
4B BT SOFT RNG: _____
4C COAST VALUE: _____
4D TURBO TIMING: _____
4E TURBO DELAY: _____
4F SLEW RATE: _____
4G RELEASE RATE: _____

☐ **STANDARD**
5A TIMING LEVEL: _____

RADIO SETTINGS

THROTTLE EPA: _____
BRAKE EPA: _____

MISCELLANEOUS


SERVO: _____
CHARGER: _____

MISC CONTROL

6A RUN MODE: ☐ F/B ☐ F/B/R
6B REVERSE PWR: ☐ 25% ☐ 50% ☐ 75% ☐ 100%
6C BATT CUTOFF: ☐ NONE ☐ 3.2V/CELL ☐ 3.4V/CELL
6D ESC TEMP CUT: ☐ OFF ☐ 221F/105C ☐ 257F/125C
6E MDT ROTATION: ☐ NORMAL ☐ REVERSE
6F BEC VOLTAGE: _____

MOTOR SETTINGS

MOTOR: _____
KV: _____
TIMING: _____
ROTOR: _____
GEARING: _____

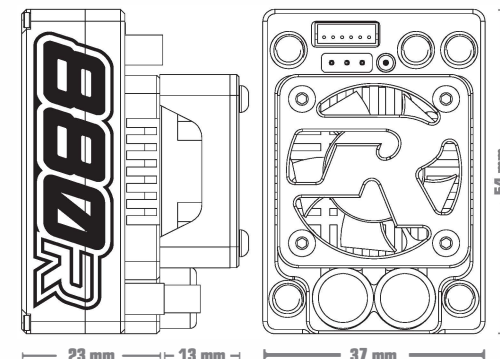

NOTES:



www.ReedyPower.com