

BLACKBOX 410R

ELECTRONICS SET-UP SHEET

Voltage input:	3.7 - 7.4/ 1-2 LiPo
On resistance (Ω):	0.00035 x2
Continuous current (A):	150
Weight without wires (g):	49
Motor limit (2-pole/4-pole):	3.5T/4800KV
SBEC:	5.5 - 7.0V/5A

DRIVER: _____ EVENT: _____ TRACK: _____ DATE: _____

CONDITIONS: _____ VEHICLE: _____ BATTERY: _____ TEMP: _____

ESC INFO

FIRMWARE:

CAPACITOR TYPE:

FAN (YES/NO):

WIRE SIZE:

PROFILE #:

THROTTLE

THROTTLE FREQ:

THROTTLE PUNCH:

THROTTLE CURVE:

DEAD BAND:

MISC CONTROL

RUN MODE:

MOTOR TYPE:

SBEC VOLTAGE:

FORWARD POWER:

REVERSE POWER:

RADIO SETTINGS

THROTTLE EPA:

BRAKE EPA:

THROTTLE EXPO:

BRAKE EXPO:

BRAKE

DRAG BRAKE:

BRAKE FREQ:

BRAKE STRENGTH:

BRAKE CURVE:

MOTOR POWER

ACCEL BOOST

START RPM:

FINISH RPM:

MAX ADV TIMING:

TOP SPEED TIMING

SLEW RATE:

MAX ADV TIMING:

DELAY TIME:

PROTECTION

BATTERY CUTOFF:

ESC TEMP CUTOFF:

MOTOR SETTINGS

MOTOR:


WIND:

TIMING:

ROTOR:

FDR/ROLLOUT:

TEMPERATURE:

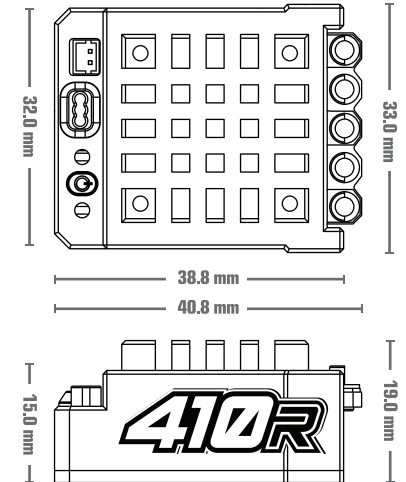

SPD SENS BRAKE

LOW SPEED STR:

HIGH SPEED STR:

SWITCHOVER RPM:



www.ReedyPower.com



www.facebook.com/ReedyPower

twitter.com/ReedyPower

